

GENERAL NOTES

ALL WORK SHALL BE DONE IN CONFORMANCE WITH THE REGULATIONS AND REQUIREMENTS OF LATEST APPROVED EDITIONS INCLUDING BUT NOT LIMITED TO THE FOLLOWING CODES, RULES AND REGULATIONS FOR NEW JERSEY:

- 2021 INTERNATIONAL RESIDENTIAL CODE, NJ EDITION
- 2021 INTERNATIONAL MECHANICAL CODE
- 2021 INTERNATIONAL ENERGY CONSERVATION CODE
- 2020 NATIONAL ELECTRICAL CODE
- 2021 NATIONAL STANDARD PLUMBING CODE
- 2021 INTERNATIONAL FUEL GAS CODE
- LOCAL UTILITY COMPANY STANDARDS
- LOCAL CODES AND ORDINANCES

DEMOLITION WORK SHALL BE DONE IN A NEAT AND ORDERLY FASHION. PREVENT ANY DAMAGE TO EXISTING STRUCTURE THAT IS TO REMAIN. REMOVE ALL DEBRIS FROM SITE.

DO NOT SCALE FROM DRAWINGS. NOTIFY ARCHITECT PRIOR TO CONSTRUCTION OF ANY DISCREPANCIES. VERIFY ALL DIMENSIONS IN FIELD PRIOR TO CONSTRUCTION.

ENGINEERED FRAMING LUMBER SHALL BE "ON-CENTER" BY BLUELINX ENGINEERED PRODUCTS. PROVIDE RIM JOISTS, WEB STIFFENERS, SQUASH BLOCKS, ETC. AND /OR ANY OTHER ADDITIONAL HARDWARE OR FRAMING ELEMENTS AS DEEMED NECESSARY BY JOIST MANUFACTURER. PROVIDE SUPPLEMENTAL BEARING HARDWARE AS REQUIRED. CERTIFIED SHOP DRAWINGS SHALL BE ACQUIRED IN THE EVENT A JOIST MANUFACTURER SUBSTITUTION WAS MADE BY THE CONTRACTOR.

POURED CONCRETE SHALL ACHIEVE A MIN. COMPRESSIVE STRENGTH AS NOTED. ALL FOOTINGS SHALL BEAR ON VIRGIN SOIL.

CONVENTIONAL FRAMING LUMBER SHALL BE HEM. FIR (No. 2 OR BETTER).

GLUE SUB-FLOOR TO FLOOR JOISTS PRIOR TO NAILING. DOUBLE FLOOR JOISTS UNDER PARALLEL PARTITIONS & KITCHEN ISLAND LOCATIONS. PROVIDE HANGERS AT ALL FLUSH BEAM CONNECTIONS. PROVIDE (3) 2"x4" WOOD POSTS AT GIRDER ENDS. PROVIDE SOLID BLOCKING UNDER ALL LOCATIONS OF CONCENTRATED LOADS.

ALL HEADERS ABOVE WINDOWS & DOORS SHALL BE (3) 2"x10" UNLESS OTHERWISE NOTED.

AS AN OPTION THE CONTRACTOR MAY USE MULTIPLE PLIES FOR LVL'S IN ORDER ACHIEVE REQUIRED WIDTH - FASTENER BOLTS SHALL BE A307 OR BETTER (OVERALL LENGTH & DEPTH SHALL BE CONTINUOUS AND REMAIN AS PER DRAWING REQUIREMENTS)

PROVIDE FIRE-BLOCKING AT ALL FLOOR LEVELS (2"x SOLID WOOD OR ½" GYP. BD.) AND IN LOCATIONS AS REQ'D BY IRC-NJ 2021, SMOKE-TIGHT.

CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND CONDITIONS PRIOR TO ANY CONSTRUCTION. NOTIFY ARCHITECT OF ANY DISCREPANCIES. THE LAYOUT OF WALLS, COLUMNS, PIERS, ETC. ARE GRAPHICALLY SHOWN. THE CONTRACTOR HAS THE RESPONSIBILITY TO LAYOUT ALL WORK AND ADJUST DIMENSIONS AS NECESSARY PRIOR TO ACTUAL CONSTRUCTION

EACH ASSEMBLY/COMPONENT/SUB-CONTRACTOR SHALL BE RESPONSIBLE FOR THEIR RESPECTIVE WORK INSOFAR AS CODE COMPLIANCE AND COMPLIANCE WITH THE ARCHITECTS PLANS AND INTENT OF THE PLANS.

WINDOW AND PATIO DOOR NUMBERS REFER TO ANDERSEN 400 SERIES "LOW E4" WITH HEAT LOCK LOGS AND SCREENS ON ALL OPERABLE UNITS. PROVIDE INSULATED GLASS THROUGHOUT AND SCREENS ON ALL OPERABLE UNITS. PROVIDE TEMPERED GLASS IN BATHROOMS & IN ALL DOORS AND LOCATIONS SHOWN ON PLANS INCLUDING LOCATIONS AS REQUIRED BY CODE AND VERIFIED BY WINDOW SUPPLIER. SET WINDOW HEAD HEIGHT @ 6'-10 1/2" A.F.F. VERIFY WINDOW FUNCTION (SWING DIRECTION AND/OR FIXED ETC.), STYLE, SIZES (WITH EXCEPTION OF EGRESS WINDOWS) WITH OWNER PRIOR TO ORDERING UNITS.

CAULK AROUND ALL DOORS, WINDOWS, AND OTHER WALL AND ROOF OPENINGS.

ELECTRICAL CONTRACTOR SHALL REVIEW THE LOCATIONS OF ALL FIXTURES, SWITCHES & OUTLETS WITH OWNER PRIOR TO INSTALLATION.

ALL RECESSED & HANGING ELECTRICAL FIXTURES SHALL HAVE DIMMERS.

PROVIDE GUARDS ON ALL NON FIXED WINDOWS LOCATED 24" OR LESS ABOVE FLOOR FOR ALL WINDOWS WHERE SILL IS GREATER THAN 6'-0" ABOVE GRADE.

ALL SMOKE DETECTORS & CARBON MONOXIDE DETECTOR SHALL HAVE A BATTERY BACK-UP AND BE HARDWIRED & INTERCONNECTED AS PER N.E.C.

ALL RAILINGS SHALL HAVE GRASPABLE (½") HANDRAILS W/ RETURNED ENDS.


ALL BUILDING MATERIALS, EQUIPMENT AND COMPONENTS SHALL BE INSTALLED / ASSEMBLED AS PER MANUFACTURERS RECOMMENDATIONS AND/OR INSTRUCTIONS.

PROVIDE APPROPRIATE FLASHING AT ALL CONDITIONS THAT TRANSITION TO DIFFERENT CONSTRUCTION & AS REQUIRED BY CODE.

ANCHORING DEVICES SHALL BE OF PROPER TYPE AND SIZE TO DRAW AND RIGIDLY SECURE MEMBERS IN PLACE-EXTERIOR FASTENINGS GALVANIZED. NAILING SHALL BE IN ACCORDANCE WITH IBC "RECOMMENDED FASTENING SCHEDULE".

BUILDING DEPT. DATA

2021 INTERNATIONAL RESIDENTIAL CODE	
AREA OF ADDITIONAL FOOTPRINT:	398 S.F.
AREA OF SECOND FLOOR ADDITION:	398 S.F.
TOTAL LIVING AREA OF ADDITION:	398 S.F.
TOTAL ENCLOSED VOLUME OF ADDITION:	8,327 C.F.
HEIGHT OF STRUCTURE:	25'-7"
TOTAL NUMBER OF STORIES:	UNCHANGED
TOTAL NUMBER BEDROOMS:	UNCHANGED (3)
LOADING: (P.S.F.)	
GROUND SNOW LOAD:	50
ATTIC LOAD:	20 LIVE, 10 DEAD
BEDROOM FLOOR LOAD:	30 LIVE, 10 DEAD
FLOOR LOAD:	40 LIVE, 10 DEAD
EXTERIOR DECK LOAD:	60 LIVE, 10 DEAD
WIND LOAD:	V3s = 115 MPH
USE GROUP:	R-5
CONSTRUCTION TYPE:	VB

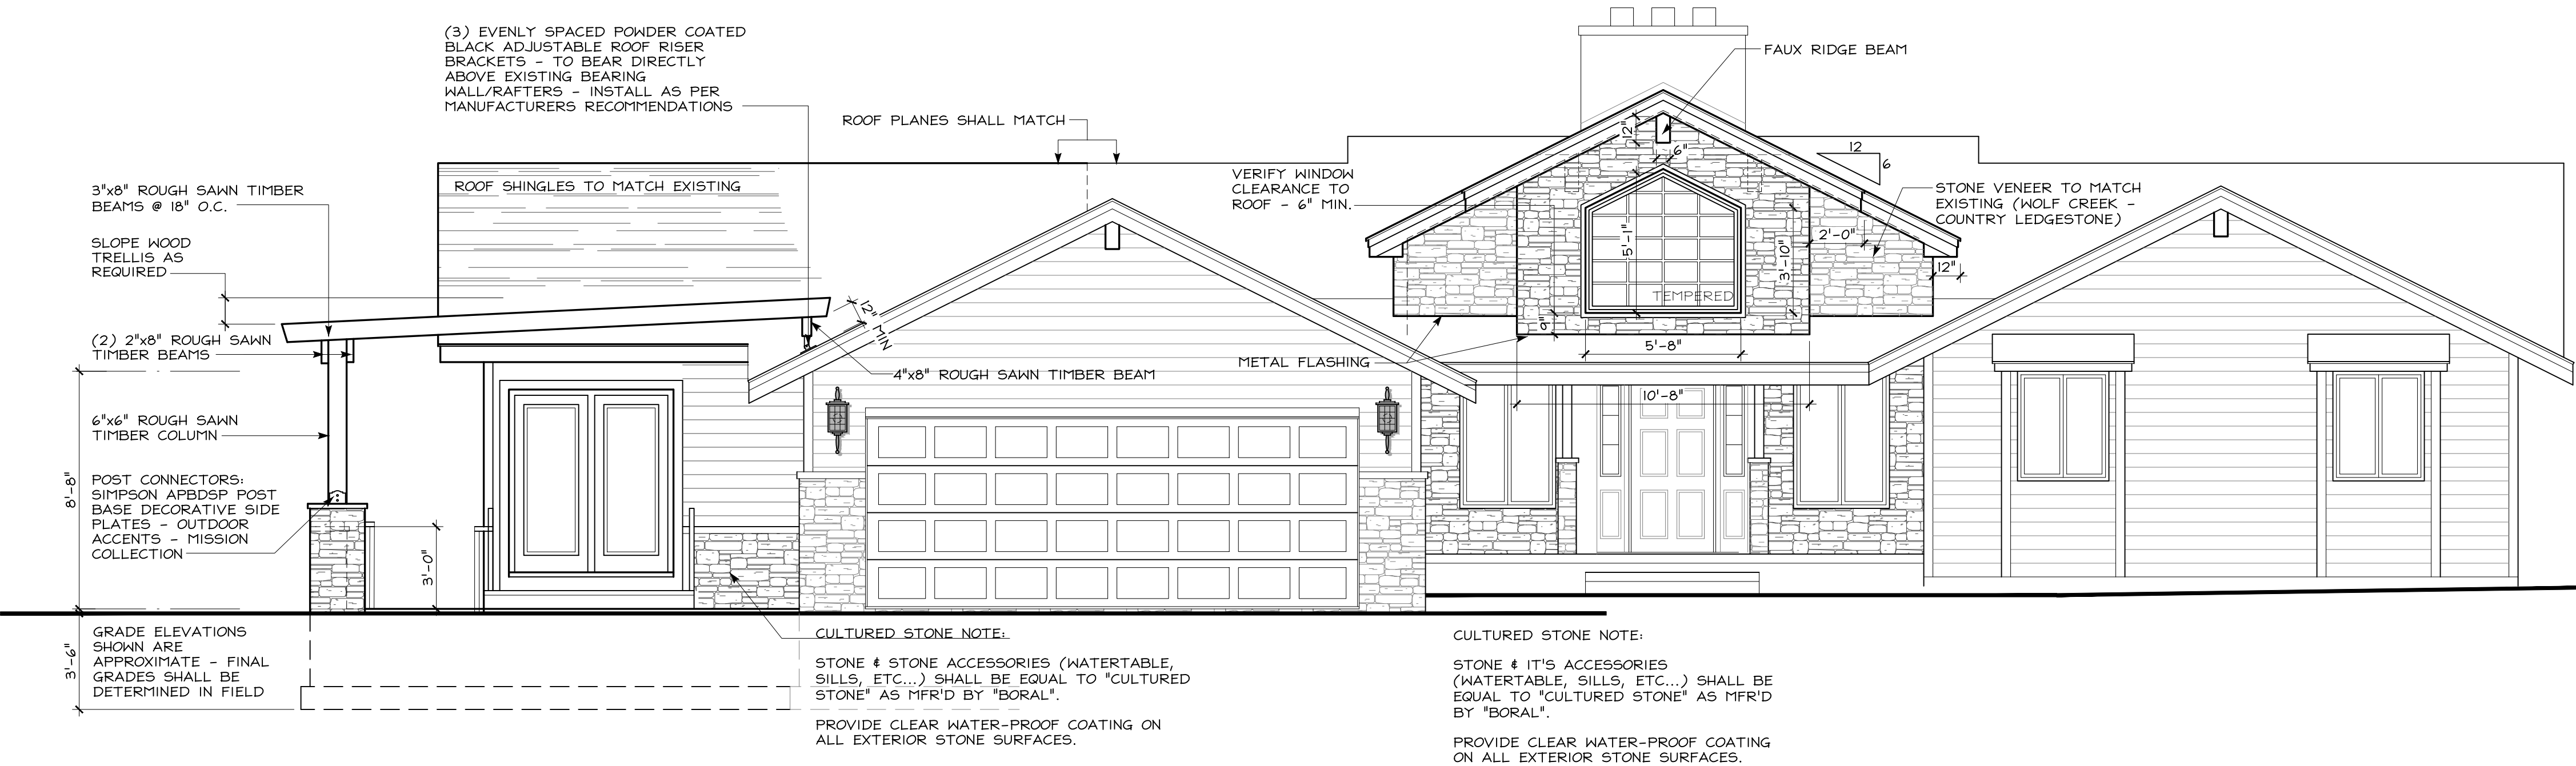

FRONT ELEVATION

SCALE: 1/4" = 1'-0"



REAR ELEVATION

SCALE: 1/4" = 1'-0"

A-1


drawing


Charles Schaffer
architect
C 7620
N 7620
NY 02258-1

CHARLES SCHAFER ASSOCIATES LLC
architect • planner

208 NEWTON SPARTA ROAD • NEWTON • NEW JERSEY 07860 973-383-7355


ADDITION TO RESIDENCE FOR:
JARED FERREIRA
35 PHILLIPS RD, GREEN TWP, NJ

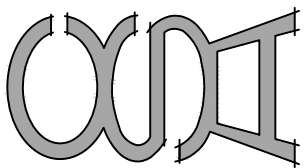

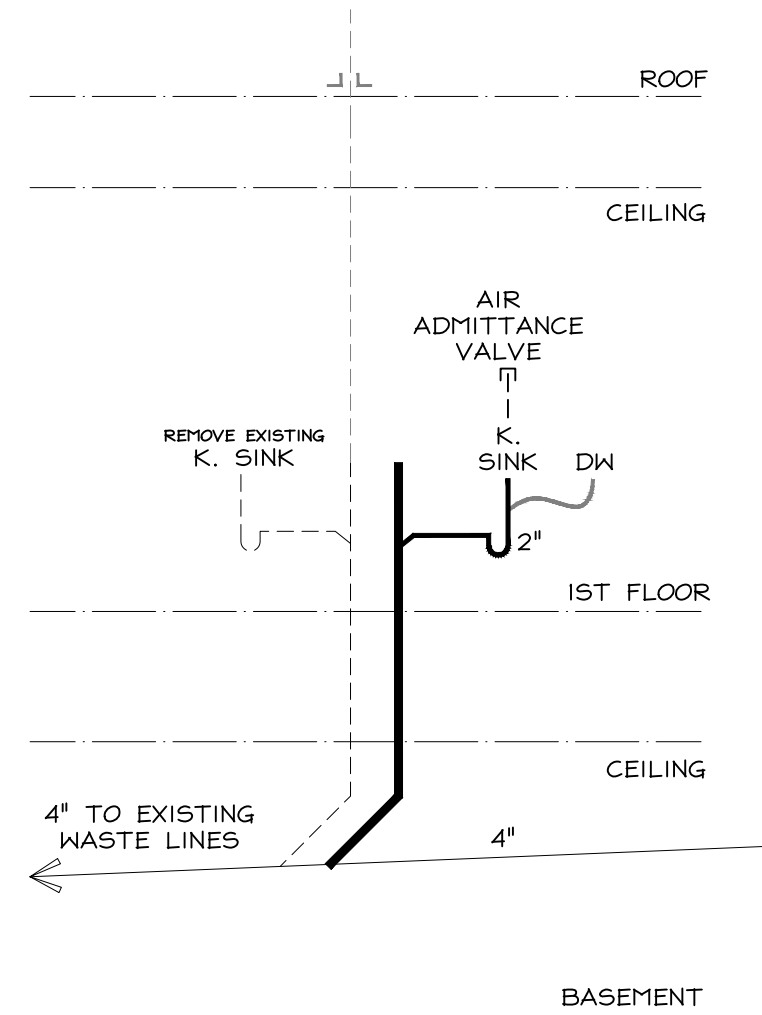


SCHEMATIC RISER DIAGRAM

NOT TO SCALE
NOTE:
ALL WATER CLOSETS, SINKS, WASHERS &
LAVS SHALL HAVE SHUT OFF VALVES
SHOWER VALVES TO BE PRESSURE
BALANCING OR THERMOSTATIC MIXING
VALVE WITH A HIGH END OF 120° F.

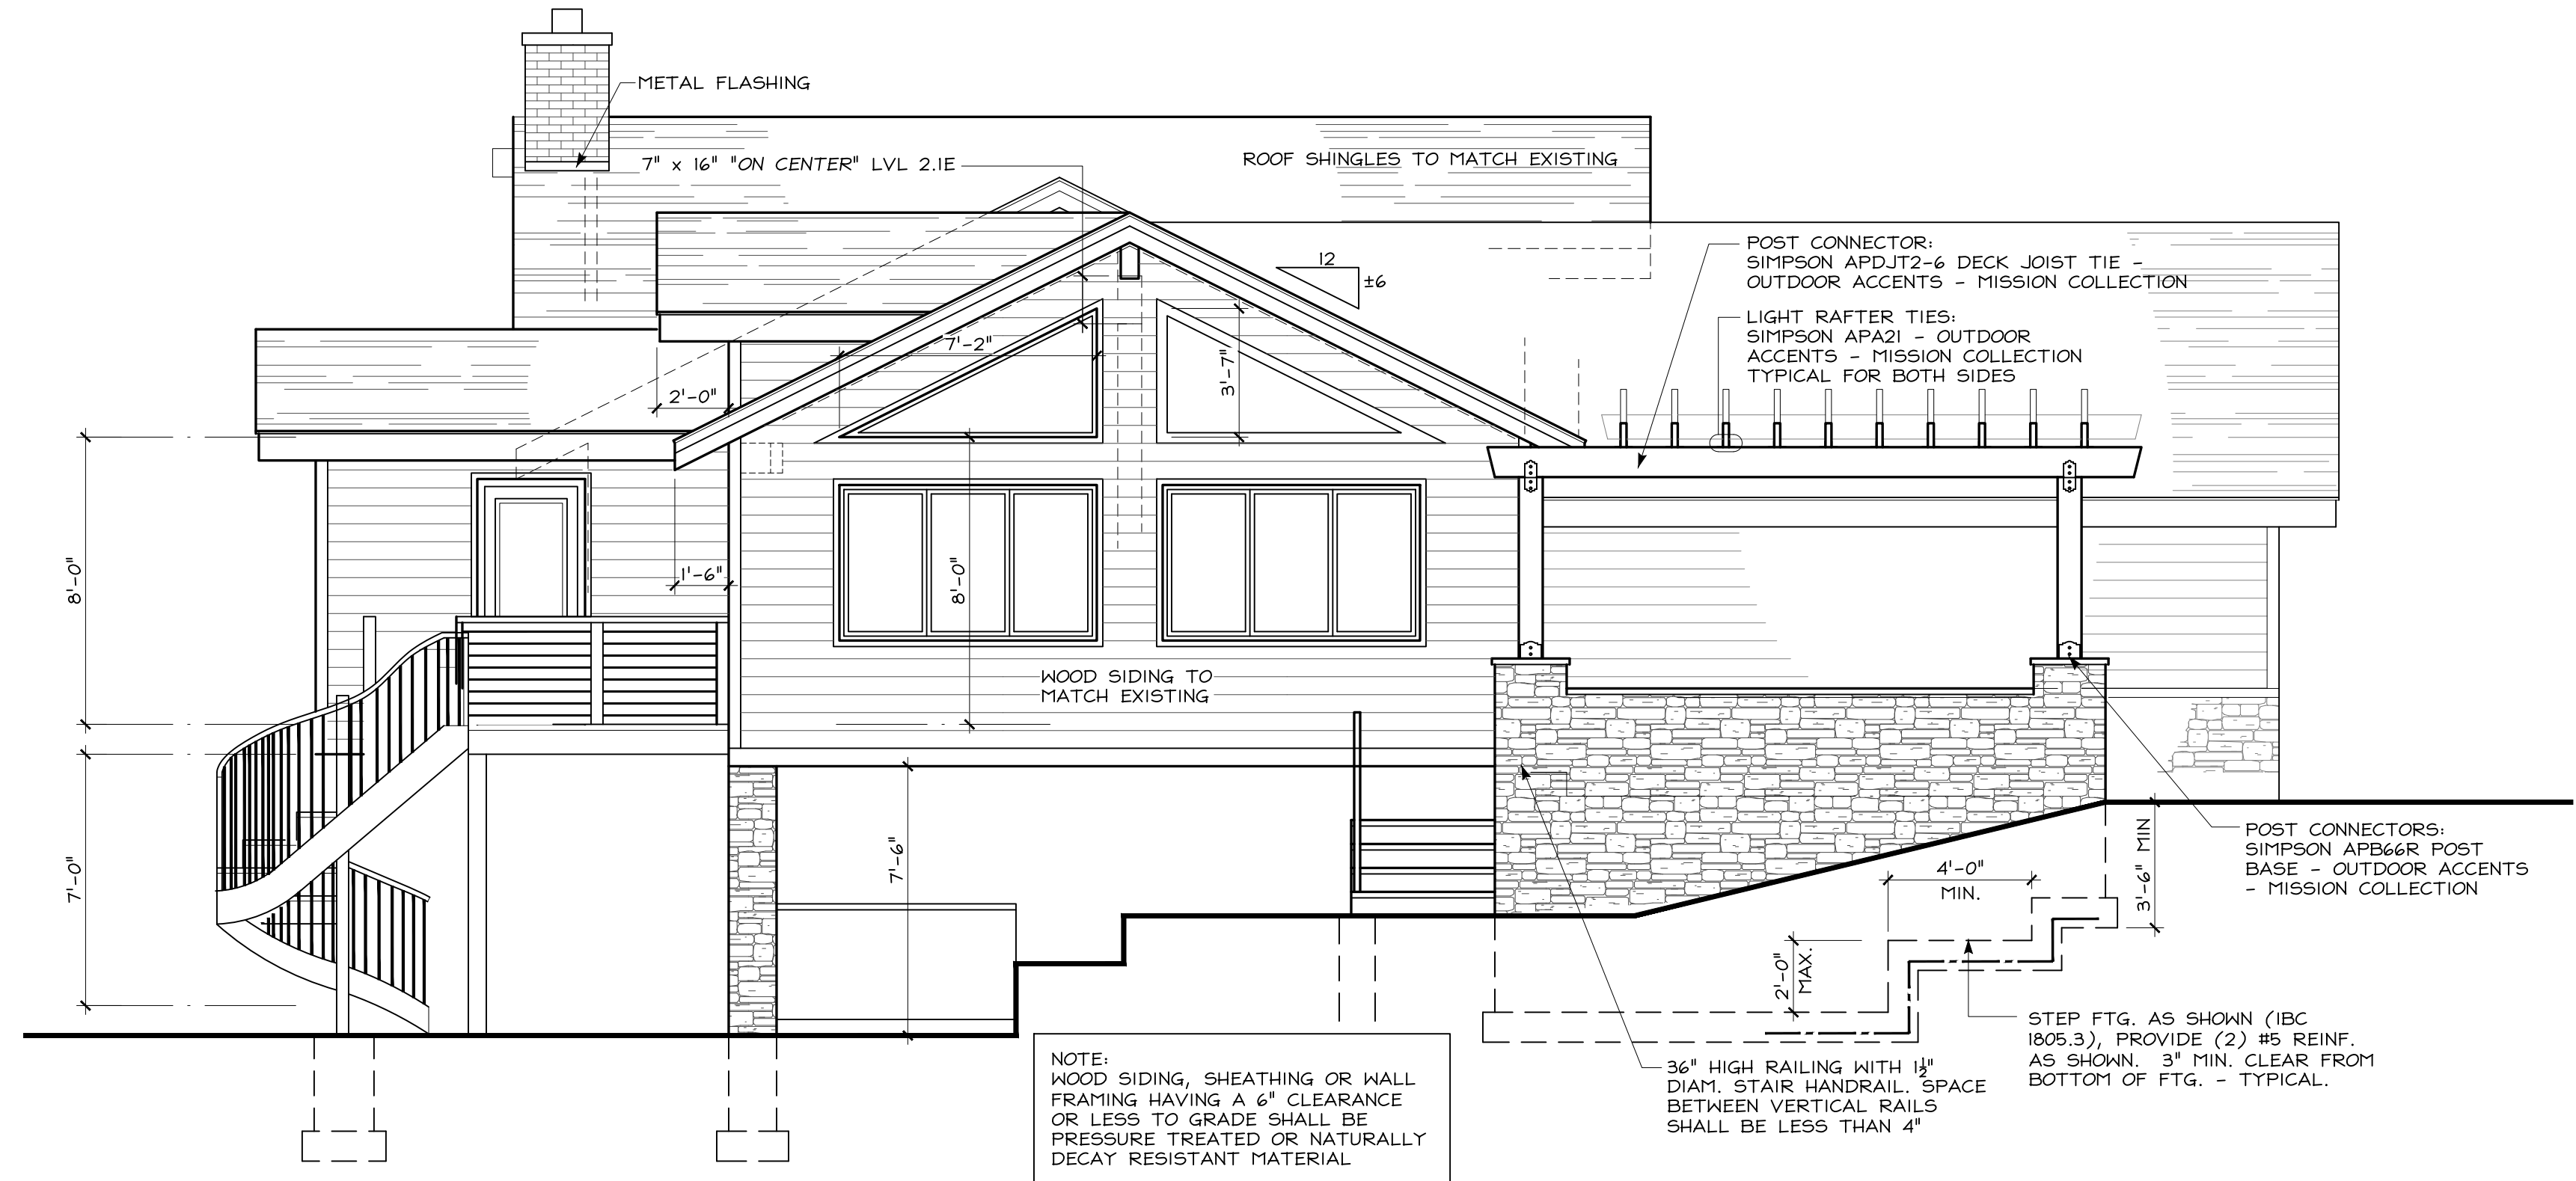


LEFT SIDE ELEVATION

SCALE: 1/4" = 1'-0"

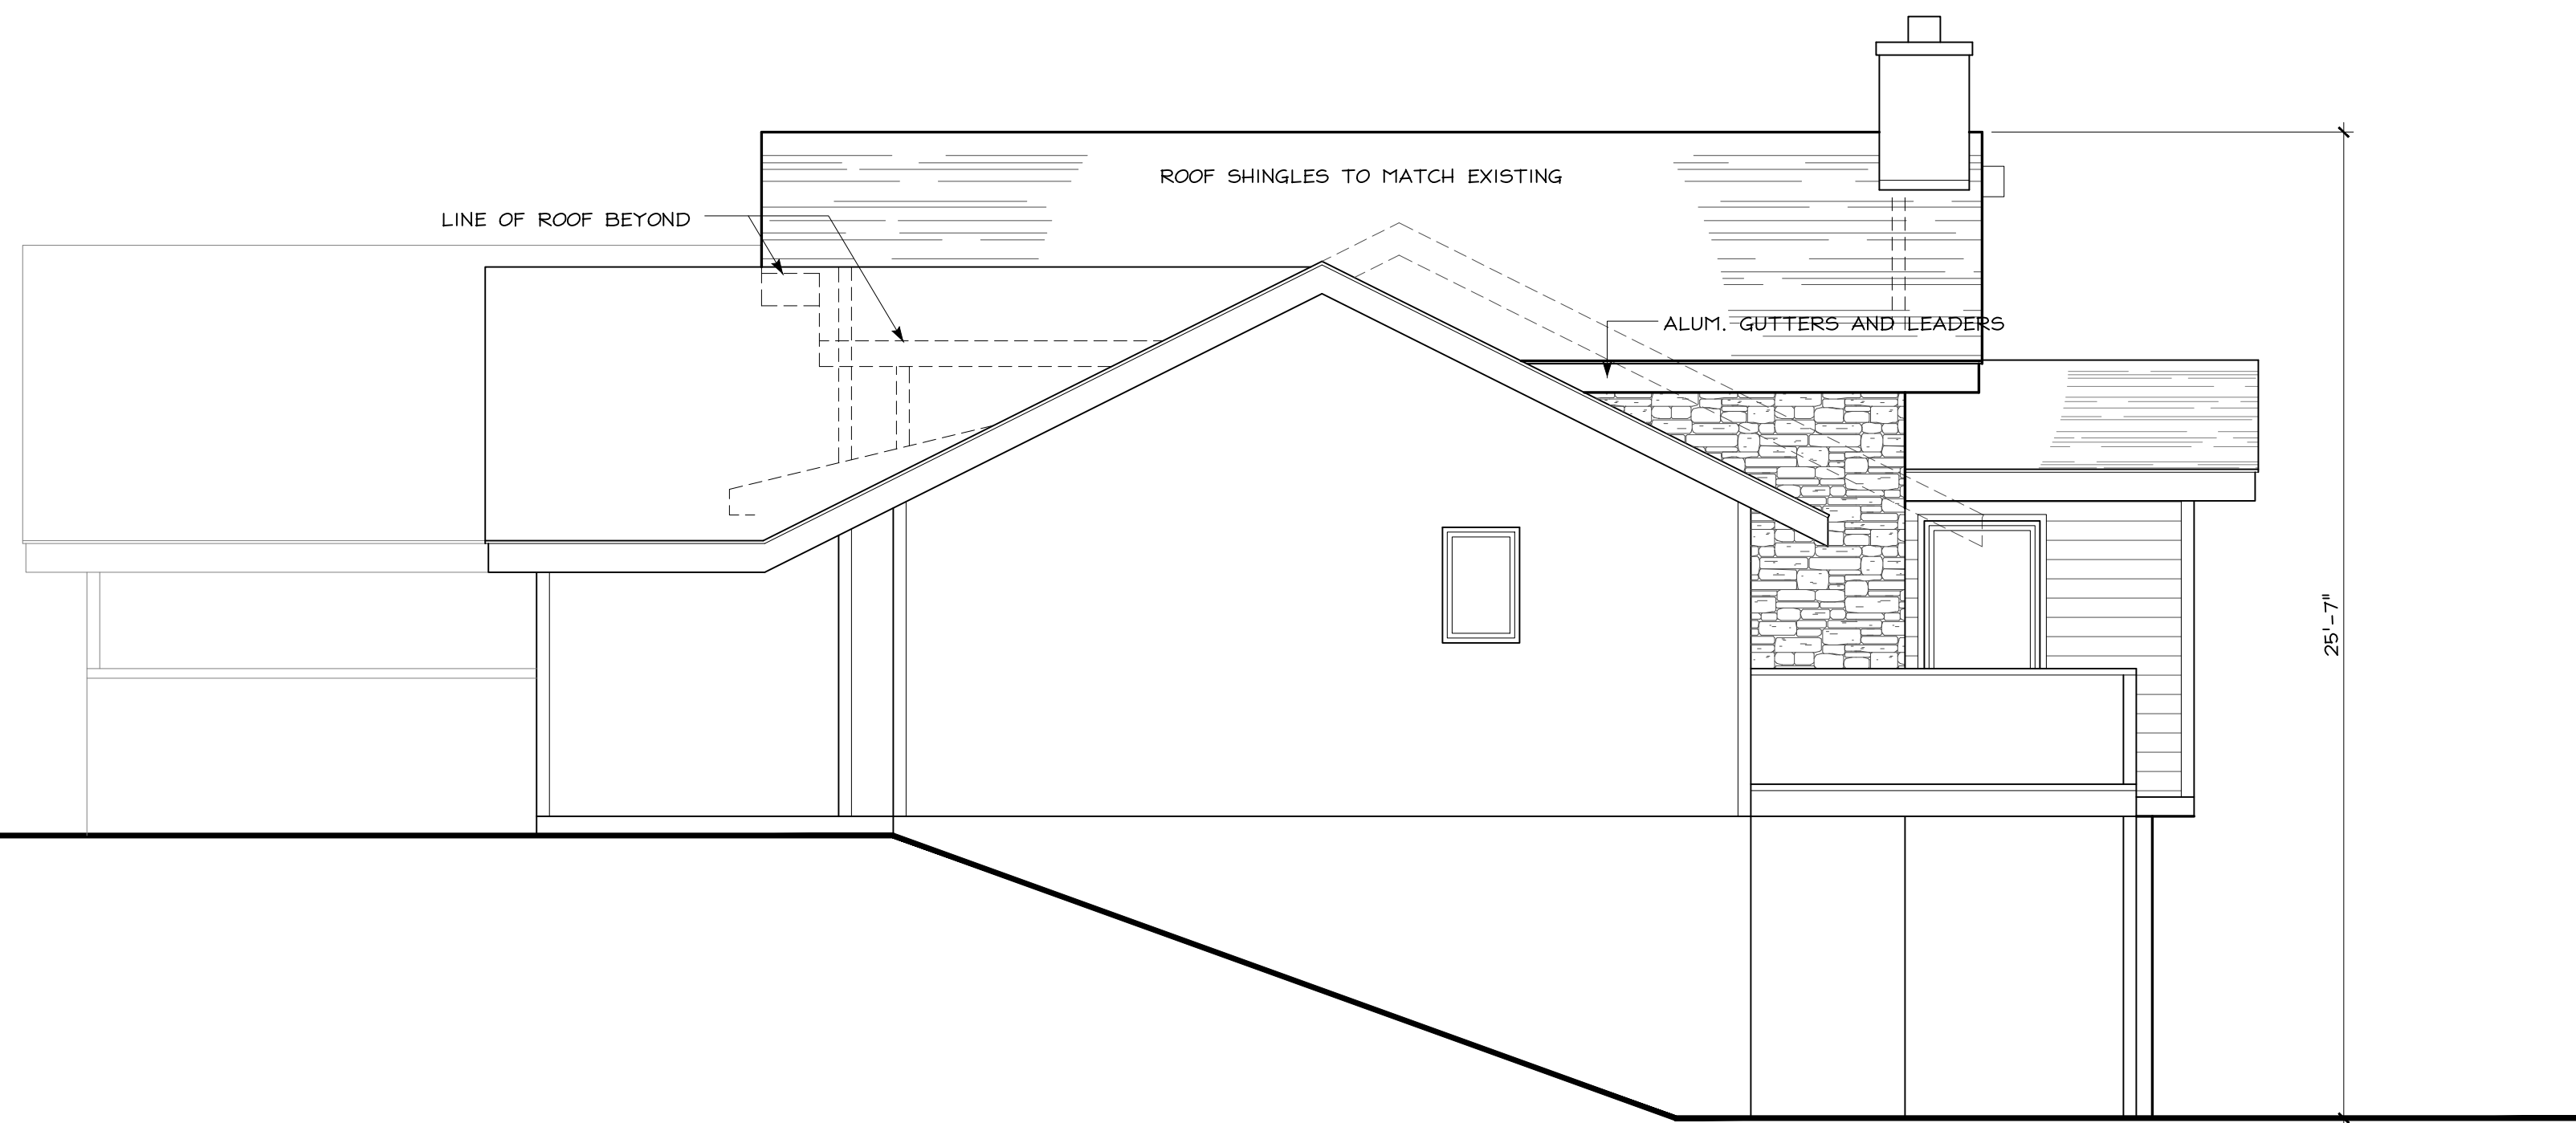


RIGHT SIDE ELEVATION

SCALE: 1/4" = 1'-0"

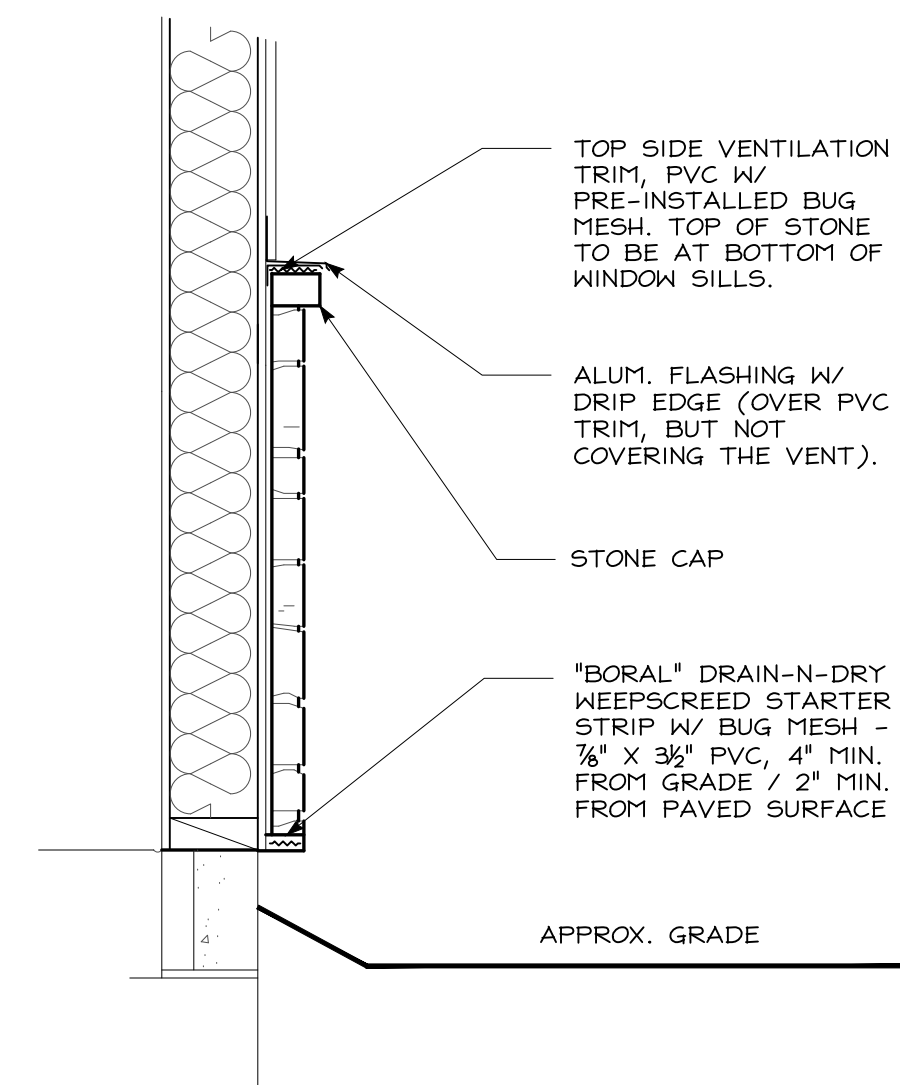

CULTURED STONE DETAIL


SCALE: 1" = 1'-0"
SHOWN @ WINDOW SILL
ALL STONE SHALL BE INSTALLED IN
STRICT ACCORDANCE WITH
MANUFACTURERS SPECIFICATIONS

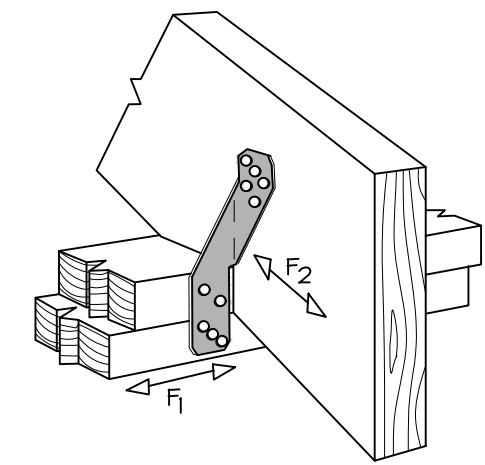

*SIMPSON STRONG-TIE® H2.5T, 18 GA., 5-8d NAILS, F1 = 135# & F2 = 145#

RAFTER TIE DETAIL

N.T.S.

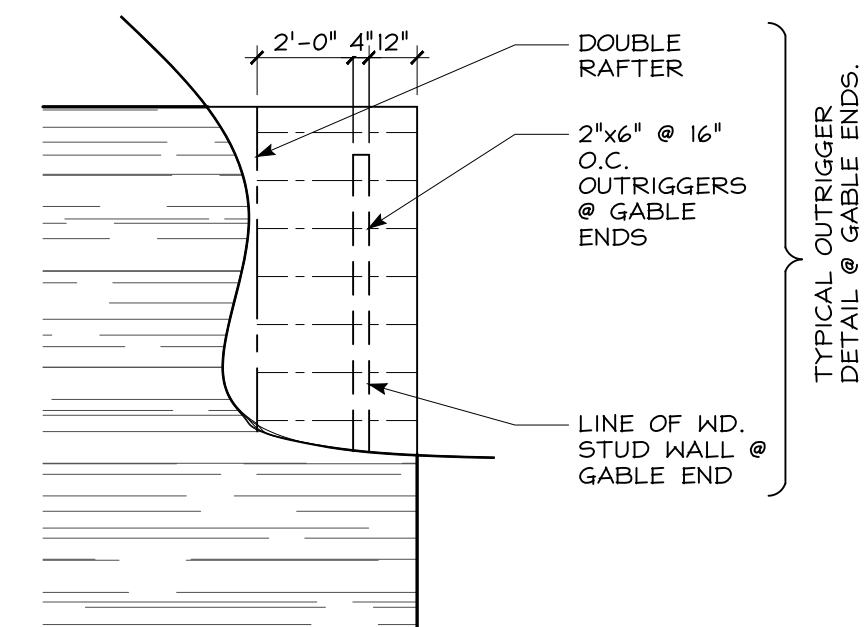

GABLE DETAIL

SCALE: 1/4" = 1'-0"

A-2

drawing

Charles Schaffer
C 7620
N 022558-1
BY

CHARLES SCHAFER ASSOCIATES LLC
architect • planner

288 NEWTON - SPARTA ROAD • NEW JERSEY 07860 973-383-7355

date 5.5.26


drawn by JM

checked by CS


ADDITION TO RESIDENCE FOR:

JARED FERREIRA

35 PHILLIPS RD, GREEN TWP, NJ

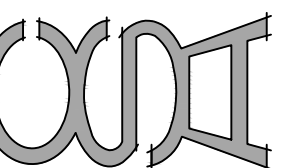



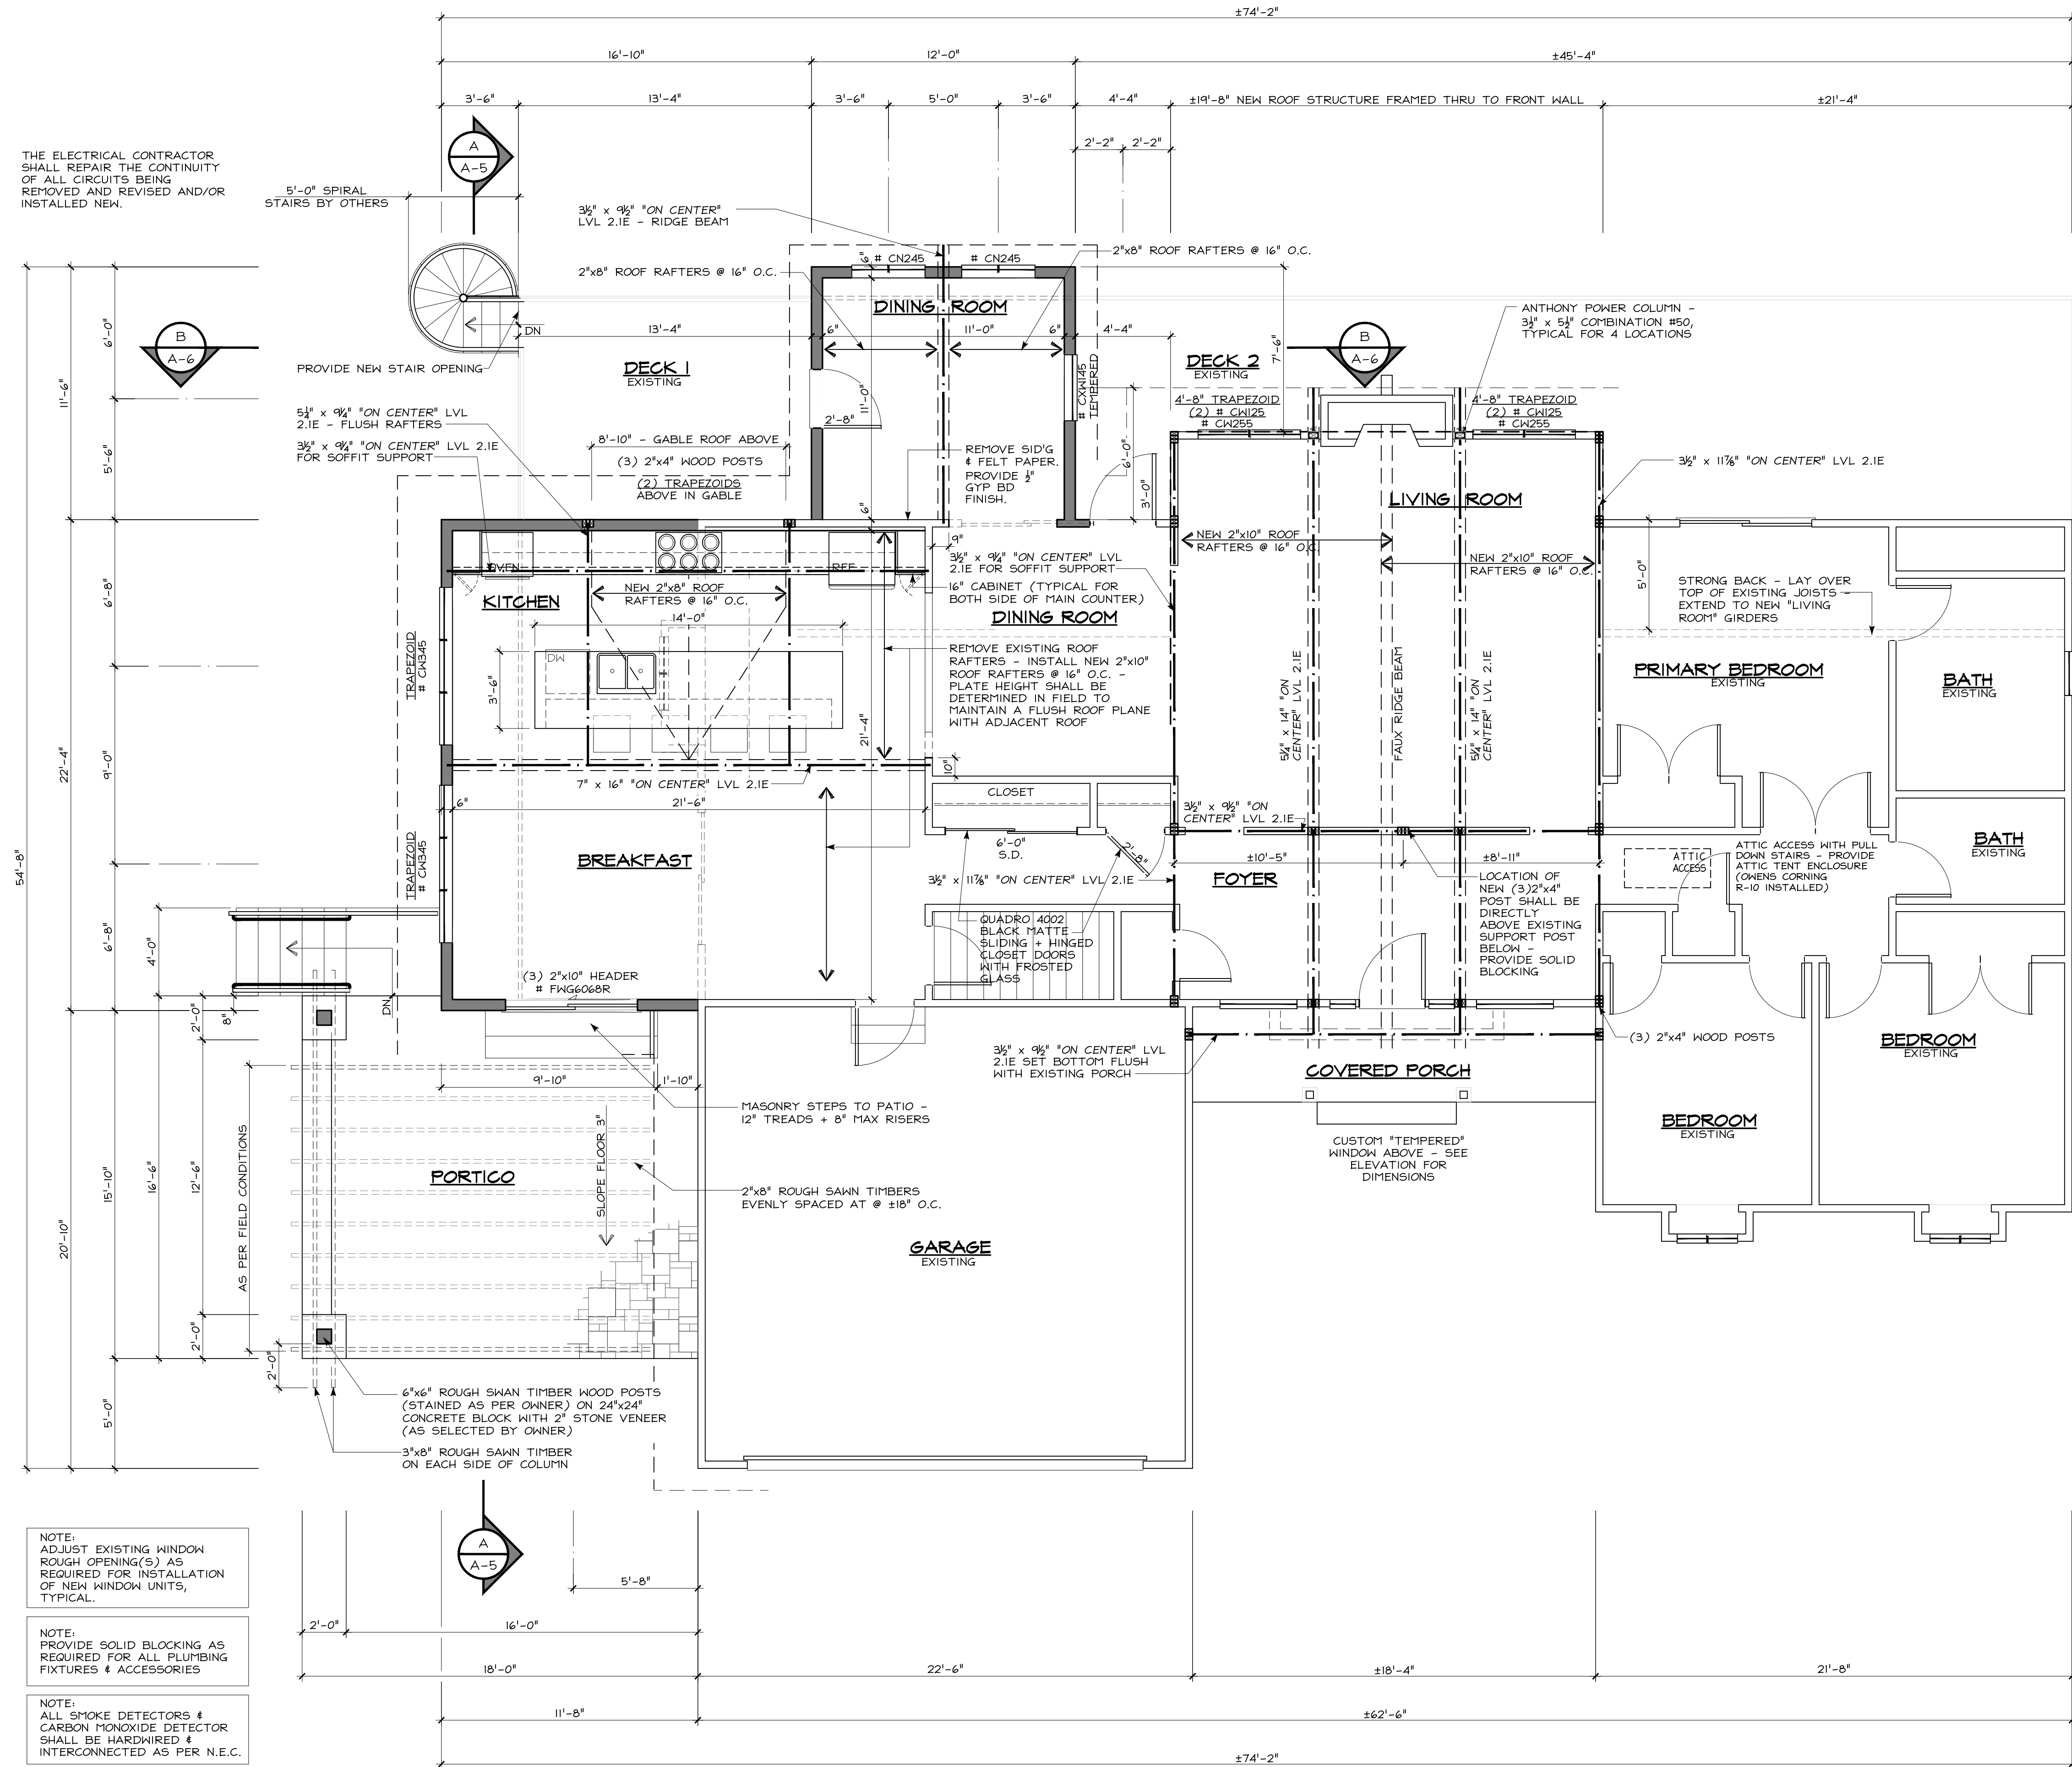

FIRST FLOOR PLAN
SCALE: 1/4" = 1'-0"


A-4


Charles Schaffer
architect . planner
C 7620
D 7620
NY 022598-1


CHARLES SCHAFER ASSOCIATES LLC
architect . planner
288 NEWTON - SPARTA ROAD • NEWTON, NEW JERSEY 07860 973-383-7355

date 5.5.26
drawn by JM
checked by CS

ADDITION TO RESIDENCE FOR:
JARED FERREIRA
35 PHILLIPS RD, GREEN TWP, NJ

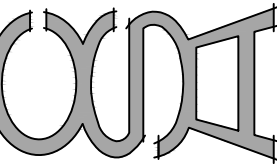



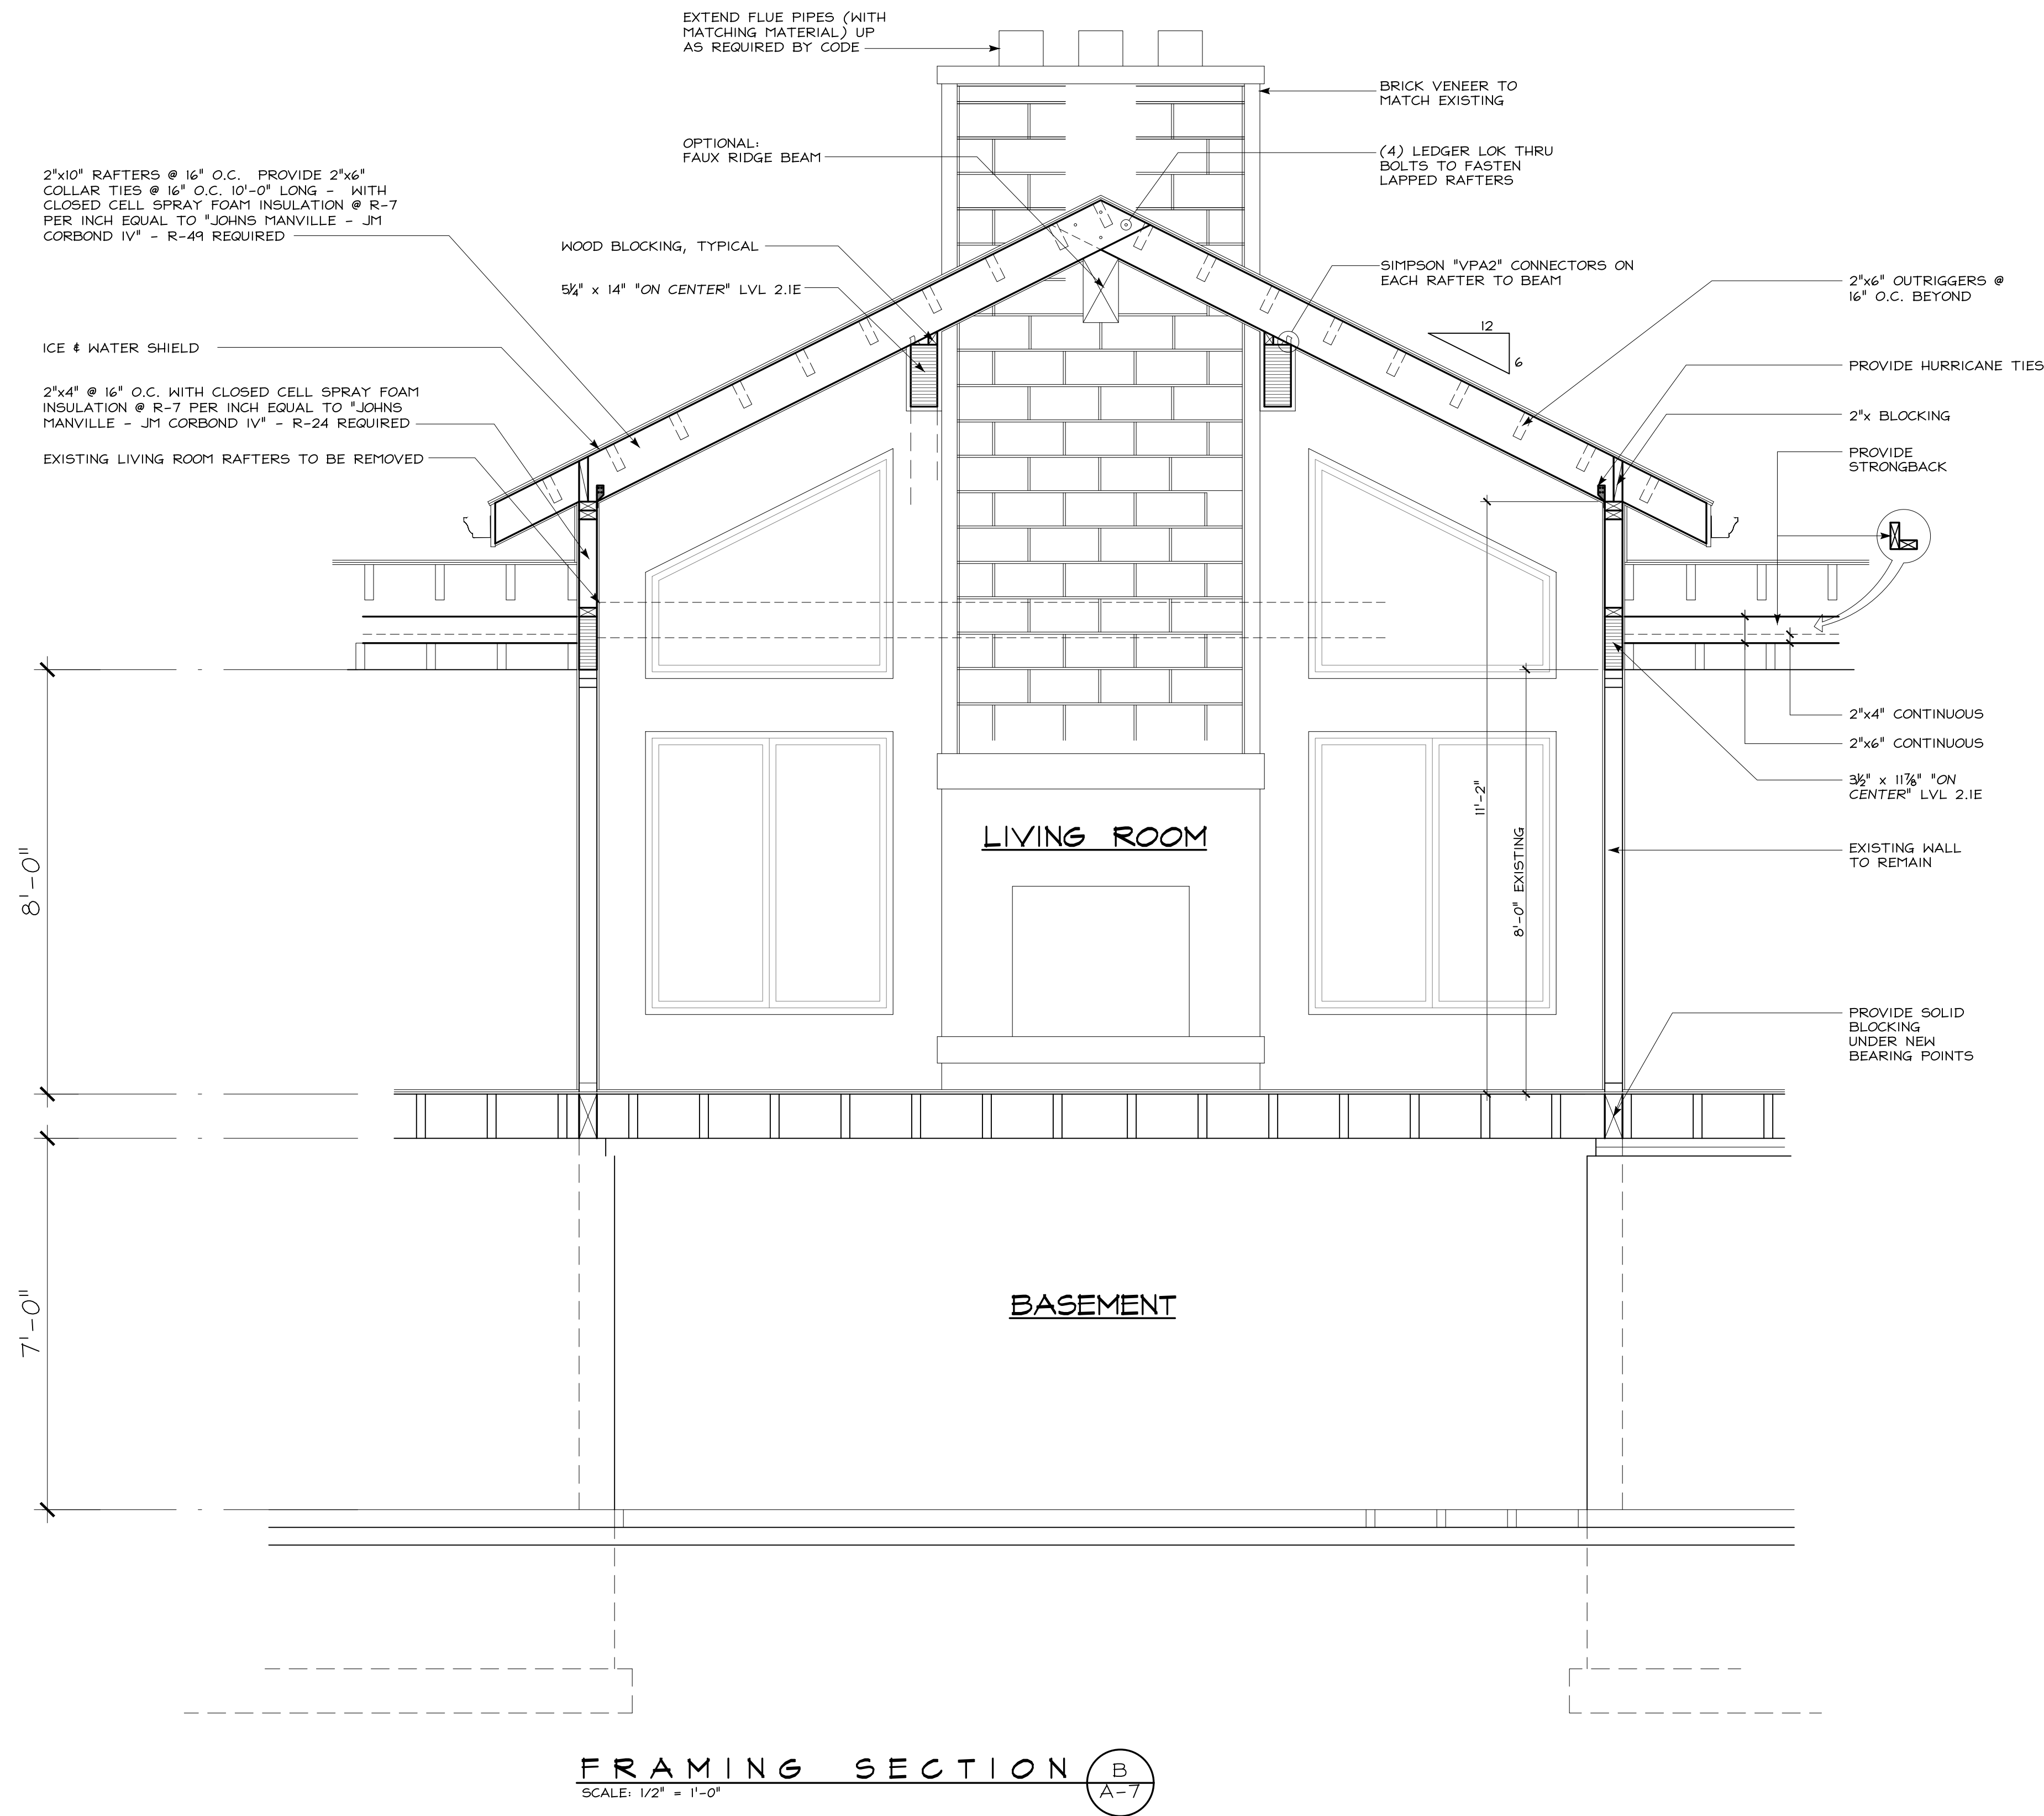

Charles Schaffer
C 7620
NY 022558-1


CHARLES SCHAFER ASSOCIATES LLC

architect . planner

208 NEWTON SPARTA ROAD • NEW JERSEY 07860 973-383-7355

ADDITION TO RESIDENCE FOR:

JARED FERREIRA
35 PHILLIPS RD, GREEN TWP, NJ

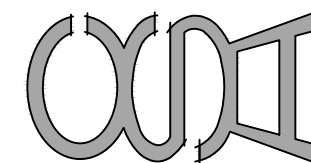

date	5.5.26
drawn by	JM
checked by	CS



Compliance Certificate

Project Information

Project Title: 114-26 Ferrieria
Energy Code: 2021 IECC
Location: Newton, New Jersey
Construction Type: Single Family
Project Type: Addition
Project Sub Type: None
Glazing Area: 26%
Climate Zone: 5a (6643 HDD)
Project No: 186681
All Electric: false
Is Renewable: false
Has Battery: false
Has Charger: false
Has Heat Pump: false

Construction Site: **Owner/Agent:** **Designer/Contractor:**

Project Notes:

Envelope Assemblies

Assembly	Gross Area or Perimeter	Cavity R-Value	Cont. R-Value	Prop. U-Factor/ F-Factor	Req. U-Factor/ F-Factor	Prop. UA	Req. UA
Ceiling: Cathedral Ceiling	918	38.0	0.0	0.027	0.024	25	22
Floor: All-Wood Joist/Truss	398	21.0	0.0	0.044	0.033	18	13
New walls: Wood Frame, 18" o.c.	1460	27.0	0.0	0.051	0.045	55	49
Window: Vinyl Frame	289			0.250	0.300	72	87
Door 2: Glass Door (over 50% glazing)	88			0.290	0.300	26	26

Compliance: Passes using UA trade-off

Compliance: 0.5% Better Than Code Max UA: 197 Your UA: 196

The % Better or Worse Than Code Index reflects how close to compliance the house is based on code trade-off rules. It DOES NOT provide an estimate of energy use or cost relative to a minimum-code home.

Slab-on-grade tradeoffs are no longer considered in the UA or performance compliance path in REScheck. Each slab-on-grade assembly in the specified climate zone must meet the minimum energy code insulation R-value and depth requirements.

Compliance Statement

The proposed building design described here is consistent with the building plans, specifications, and other calculations submitted with the permit application. The proposed building has been designed to meet the 2021 IECC requirements in REScheck-Web and to comply with the mandatory requirements listed in the REScheck Inspection Checklist.

Name - Title **Signature** **Date**

Insulation Inspection

Section # & Req.ID	Insulation Inspection	Plans Verified Value	Field Verified Value	Complies?	Comments/Assumptions
303.1 (R13)	All installed insulation is labeled or the installed R-values provided.			☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
402.1, 402.2, 402.3 (R13)	Floor insulation R-value.	R- ☐ Wood ☐ Steel	R- ☐ Wood ☐ Steel	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	See the Envelope Assemblies table for values
402.1, 402.2, 402.3 (R13)	Wall insulation R-value. If this is a mass wall with at least 1" of the wall insulation on the wall exterior, the exterior insulation requirement applies (R16).	R- ☐ Wood ☐ Mass ☐ Steel	R- ☐ Wood ☐ Mass ☐ Steel	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	See the Envelope Assemblies table for values
303.2 (R4)	Wall insulation is installed per manufacturer's instructions.			☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	

Additional Comments/Assumptions:

1 High Impact (Tier 1) 2 Medium Impact (Tier 2) 3 Low Impact (Tier 3)

Report Title: 114-26 Ferrieria Report Date: 4/27/26, 8:31 AM 8 of 12



Energy Code: 2021 IECC

Requirements: 97% were addressed directly in the REScheck software

Text in the "Comments/Assumptions" column is provided by the user in the REScheck Requirements screen. For each requirement, the user certifies that a code requirement will be met and how that is documented, or that an exception is being claimed. Where compliance is itemized in a separate table, a reference to that table is provided.

Pre-Inspection/Plan Review

Section # & Req.ID	Pre-Inspection/Plan Review	Plans Verified Value	Field Verified Value	Complies?	Comments/Assumptions
103.1, 103.2 (PR1)	Construction drawings and documentation demonstrate energy code compliance for the building envelope. Thermal envelope and energy compliance path represented on construction documents.			☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
103.1, 103.2, 403.8 (PR3)	Construction drawings and documentation demonstrate energy code compliance for lighting and mechanical systems. Systems serving multiple dwelling units must demonstrate compliance with the IECC Commercial Provisions.			☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
302.1, 403.7 (PR2)	Heating and cooling equipment is sized per ACCA Manual S based on loads calculated per ACCA Manual J or other methods approved by the code official.	Heating: Blttr Cooling: Blttr	Heating: Blttr Cooling: Blttr	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	

Additional Comments/Assumptions:

1 High Impact (Tier 1) 2 Medium Impact (Tier 2) 3 Low Impact (Tier 3)

Foundation Inspection

Section # & Req.ID	Foundation Inspection	Complies?	Comments/Assumptions
303.2.1 (FO11)	A protective covering is installed to protect exposed exterior insulation and extends a minimum of 6 in. below grade.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	Exception: Requirement is not applicable.
403.9 (FR12)	Snow and ice-melting system controls installed to shut off system when pavement temperature > 5°F and no precipitation.	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	Exception: Requirement is not applicable.

Additional Comments/Assumptions:

1 High Impact (Tier 1) 2 Medium Impact (Tier 2) 3 Low Impact (Tier 3)

Final Inspection Provisions

Section # & Req.ID	Final Inspection Provisions	Plans Verified Value	Field Verified Value	Complies?	Comments/Assumptions
303.1.1, 303.2 (F12)	Ceiling insulation installed per manufacturer's instructions. Blown insulation marked every 300 ft ² .			☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
303.3 (F18)	Manufacturer manuals for mechanical and water heating systems have been provided.			☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
403.2 (F20)	Hot water boilers supplying heat through one- or two-pipe heating systems have automatic air-to-water-back control to lower boiler water temperature based on outdoor temperature, indoor temperature or water temperature sensing.			☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	Exception: Requirement is not applicable.
403.3.4.1 (F124)	Air handler leakage designated by manufacturer at <=2% of design air flow.			☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	Exception: Requirement is not applicable.
403.3.6 (F4)	Duct tightness test result of <=4 cfm/100 ft ² across the system or <=3 cfm/100 ft ² around air handler @ 25 Pa. Duct leakage > 25 Pa. R2 for ducts within thermal envelope. For rough-in tests, verification may need to occur during framing inspection.	cfm/100 ft ²	cfm/100 ft ²	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	Exception: Requirement is not applicable.
403.5.1 (F11)	Circulating service hot water systems have automatic or accessible manual controls.			☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	Exception: Requirement is not applicable.
404.1 (F6)	100% of permanent fixtures have high efficiency lamps.			☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
403.5.1.1 (F128)	Heated water circulation systems have a circulation pump. The system return pipe is a dedicated return pipe or a cold water supply pipe. Gravity and thermal circulation systems are not present. Controls for circulating hot water system pumps start the pump with signal for hot water demand within the occupancy. Controls automatically turn off the pump when water is in circulation loop is at set-point temperature and no demand for hot water exists.			☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	Exception: Requirement is not applicable.

Report Title: 114-26 Ferrieria Report Date: 4/27/26, 8:31 AM 9 of 12

Framing / Rough-In Inspection

Section # & Req.ID	Framing / Rough-In Inspection	Plans Verified Value	Field Verified Value	Complies?	Comments/Assumptions
402.1, 402.1.1, 402.1.3, 402.5 (FR2)	Glazing U-factor (area-weighted average).	U-	U-	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	See the Envelope Assemblies table for values
402.4.1.1 (FR23)	Air barrier and thermal barrier installed per manufacturer's instructions.			☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
402.4.3 (FR20)	Penetration that is not site built is listed and labeled as meeting AAMA W980.5A 1011.5.2(A44) or has infiltration rates per NFRC 400 that do not exceed code limits.			☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
402.4.5 (FR16)	R-rated recessed lighting fixtures sealed at housing/interior finish and labeled to indicate <=2.0 cfm leakage at 75 Pa.			☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	Exception: Requirement is not applicable.
403.3.1 (FR12)	Supply and return ducts in attics installed >= R-8 where duct is <= 3 inches in diameter and >= R-6 where < 3 inches.			☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	Exception: Ducts located outside the building envelope.
403.3.4 (FR13)	Ducts, air handlers and filter boxes/beams compliant with International Mechanical Code or International Residential Code, as applicable.			☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	Exception: Requirement is not applicable.
403.3.2 (FR20)	Ducts declared to be within the conditioned space are either: 1) continuous air barrier and within the building thermal envelope; 2) buried within ceiling insulation in accordance with Section R403.3.6 and the air handler is located completely within the continuous air barrier and within the building thermal envelope; and the duct leakage is <= 1.5 cfm / 100 square feet of conditioned floor area served by the duct system; or 3) the ceiling insulation R-value installed against and above the insulated duct >= to the proposed ceiling insulation R-value, less the R-value of the insulation on the duct.			☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	

Report Title: 114-26 Ferrieria Report Date: 4/27/26, 8:31 AM 5 of 12

Section # & Req.ID	Framing / Rough-In Inspection	Plans Verified Value	Field Verified Value	Complies?	Comments/Assumptions
403.3.1 (FR15)	Building cavities are not used as ducts of plenums.			☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
403.4 (FR17)	HVAC piping conveying fluids above 105 °F or chilled fluids below 55 °F are insulated to aR-3.	R-	R-	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	Exception: Requirement is not applicable.
402.4.6 (FR29)	Electrical and communication boxes installed in the thermal boundary of the envelope sealed to limit air leakage between conditioned and unconditioned spaces.			☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	Exception: Requirement is not applicable.
403.4.1 (FR24)	Protection of insulation on HVAC piping.			☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	Exception: Requirement is not applicable.
403.5.2 (FR18)	Hot water pipes are insulated to aR-2.	R-	R-	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	Exception: Requirement is not applicable.
403.6 (FR19)	Automatic or gravity dampers are installed on all outdoor air intakes and exhausts for mechanical ventilation systems.			☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
403.6.1 (FR30)	Ventilation systems in climate zones 1 & 8 shall utilize heat or energy recovery.			☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
303.1.3 (FR4)	U-factors of fenestration products are determined in accordance with the NFRC test procedure or taken from the default table.			☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	

Additional Comments/Assumptions:

Report Title: 114-26 Ferrieria Report Date: 4/27/26, 8:31 AM 6 of 12

Section # & Req.ID	Final Inspection Provisions	Plans Verified Value	Field Verified Value	Complies?	Comments/Assumptions
402.1, 402.1.1, 402.1.3, 402.2, 402.6 (F1)	Ceiling insulation R-value.	R- ☐ Wood ☐ Steel	R- ☐ Wood ☐ Steel	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	See the Envelope Assemblies table for values
402.2.3 (F122)	Vented attics with air permeable insulation include baffles adjacent to soffit and save vents that extends over insulation.			☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	Exception: Requirement is not applicable.
402.2.4 (F1)	Attic access hatch and door insulation R-value of the adjacent assembly.	R-	R-	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
402.4.1.3 (F117)	Blower door test @ 50 Pa. <=5.0 a/ch in Climate Zones 1-2 and <=3.0 a/ch in Climate Zones 3-8.	ACH 50 =	ACH 50 =	☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
402.4.4 (F129)	Where open combustion air ducts provide combustion air to open combustion fuel burning appliances, the appliances and combustion air opening are located outside the building thermal envelope or enclosed in a room, isolated from inside the thermal envelope. Such rooms are sealed and insulated.			☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	
403.1.1 (F9)	Programmable thermostats are installed for control of primary heating and cooling systems and initially set by manufacturer to code specifications.			☐ Complies ☐ Does Not Comply ☐ Not Observable ☐ Not Applicable	Exception: Requirement is not applicable.

Additional Comments/Assumptions:

1 High Impact (Tier 1) 2 Medium Impact (Tier 2) 3 Low Impact (Tier 3)

Report Title: 114-26 Ferrieria Report Date: 4/27/26, 8:31 AM 11 of 12



Insulation Rating		R-Value	
Above-Grade Wall		27.00	
Below-Grade Wall		0.00	
Floor		21.00	
Ceiling / Roof		38.00	
Ductwork (unconditioned spaces):		_____	
Glass & Door Rating		U-Factor	SHGC
Window		0.25	
Door		0.29	0.23
Skylight		0.00	
Heating & Cooling Equipment		Efficiency	
Heating System:		_____	
Cooling System:		_____	
Water Heater:		_____	

Signature _____ **Date:** _____

Comments: _____

Report Title: 114-26 Ferrieria Report Date: 4/27/26

114-26

Job number

A-7

drawing

Charles Schaffer
C. Schaffer
022598-1

CHARLES SCHAFER ASSOCIATES LLC
architect • planner

200 NEWTON - SEAPORT ROAD • NEW JERSEY 07800 973-383-7355

ADDITION TO RESIDENCE FOR:
JARED FERREIRA
35 PHILLIPS RD, GREEN TWP, NJ



ELECTRICAL NOTES

ELECTRICAL CONTRACTOR SHALL VERIFY AVAILABILITY OF SPECIFIED SERVICE WITH POWER & LIGHT COMPANY.

ELECTRICAL CONTRACTOR SHALL VERIFY WITH OWNER PRIOR TO CONSTRUCTION OF FINAL SERVICE REQUIREMENTS.

ALL WIRING SHALL BE CONCEALED IN WALLS, FLOORS OR CEILINGS WHEREVER POSSIBLE

ALL WIRING SHALL BE MINIMUM #14 AWG COPPER WIRE WITH GROUND WIRE.

ALL RECEPTACLES & SWITCHES SHALL BE LEVITON OR EQUAL.

THE ELECTRICAL CONTRACTOR SHALL OBTAIN AND PAY FOR ALL PERMITS AND INSPECTIONS REQUIRED BY THE LOCAL AND STATE AGENCIES.

GROUND CONNECTIONS SHALL BE PROVIDED AS REQUIRED BY THE LATEST EDITION OF THE NATIONAL ELECTRICAL CODE FOR ALL DISTRIBUTION SYSTEMS AND ALL METALLIC PARTS OR APPARATUS ENCLOSING "LIVE" ELECTRICAL WIRING AND/OR PARTS.

ALL ELECTRICAL WORK SHALL BE PERFORMED IN STRICT CONFORMANCE WITH THE LATEST EDITION OF THE NATIONAL ELECTRICAL CODE AND ALL PREVAILING LOCAL CODES.

THIS DRAWING IS INTENDED TO INDICATE DIAGRAMMATICALLY THE EXTENT, GENERAL CHARACTER AND APPROXIMATE LOCATIONS OF WORK INTENDED. WORK INTENDED BUT HAVING MINOR DETAILS OBVIOUSLY OMITTED OR NOT SHOWN SHALL BE FURNISHED COMPLETE TO PERFORM THE FUNCTION INTENDED WITHOUT ADDITIONAL COST TO THE OWNER.

ALL BATHROOMS SHALL HAVE EXHAUST FANS VENTED TO EXTERIOR - SWITCH LOCATIONS SHALL BE VERIFIED WITH OWNER

ALL SMOKE DETECTORS & CARBON MONOXIDE DETECTORS SHALL BE HARDWIRED WITH A BATTERY BACK-UP. INSTALL IN LOCATIONS AS SHOWN ON PLANS, AS REQUIRED BY CODE AND AS PER MANUFACTURERS' RECOMMENDATIONS.

BUILDING CONTRACTOR SHALL PROVIDE ENERGY EFFICIENCY CERTIFICATE LABEL FOR ELECTRICAL PANEL IN ACCORDANCE WITH THE 2021 INTERNATIONAL RESIDENTIAL CODE

ELECTRICAL CONTRACTOR SHALL REVIEW THE LOCATIONS OF ALL FIXTURES, SWITCHES & OUTLETS WITH OWNER PRIOR TO INSTALLATION.

ALL RECESSED & HANGING ELECTRICAL FIXTURES SHALL HAVE DIMMERS.


ELECTRICIAN SHALL VERIFY WITH OWNER ON INSTALLATION OF MOTORIZED SHADES IN THE FOLLOWING SPACES: KITCHEN, DINING ROOM, LIVING ROOM + PRIMARY BEDROOM

ELECTRICIAN TO PROVIDE NEW EAVE LIGHTING.


ALL SMOKE DETECTORS & CARBON MONOXIDE DETECTOR SHALL HAVE A BATTERY BACK-UP AND BE HARDWIRED & INTERCONNECTED AS PER N.E.C.

GUARANTEE AND WARRANTY:

THE ELECTRICAL CONTRACTOR SHALL AND HEREBY DOES WARRANT AND GUARANTEE THAT ALL WORK DONE BY HIM SHALL BE FREE OF DEFECTIVE MATERIALS AND WORKMANSHIP FOR A PERIOD OF ONE (1) YEAR FROM DATE OF FINAL ACCEPTANCE. THE ELECTRICAL CONTRACTOR SHALL FURTHER WARRANT THAT ALL MATERIALS FURNISHED AND WORK EXECUTED BY HIM IS IN ACCORDANCE WITH ALL STATE AND LOCAL LAWS, ORDINANCES AND REGULATIONS.

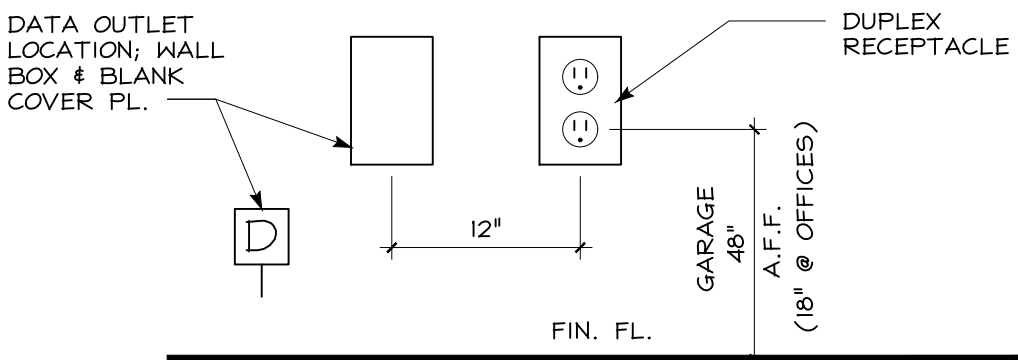


OUTLET MOUNTING DETAIL
NO SCALE

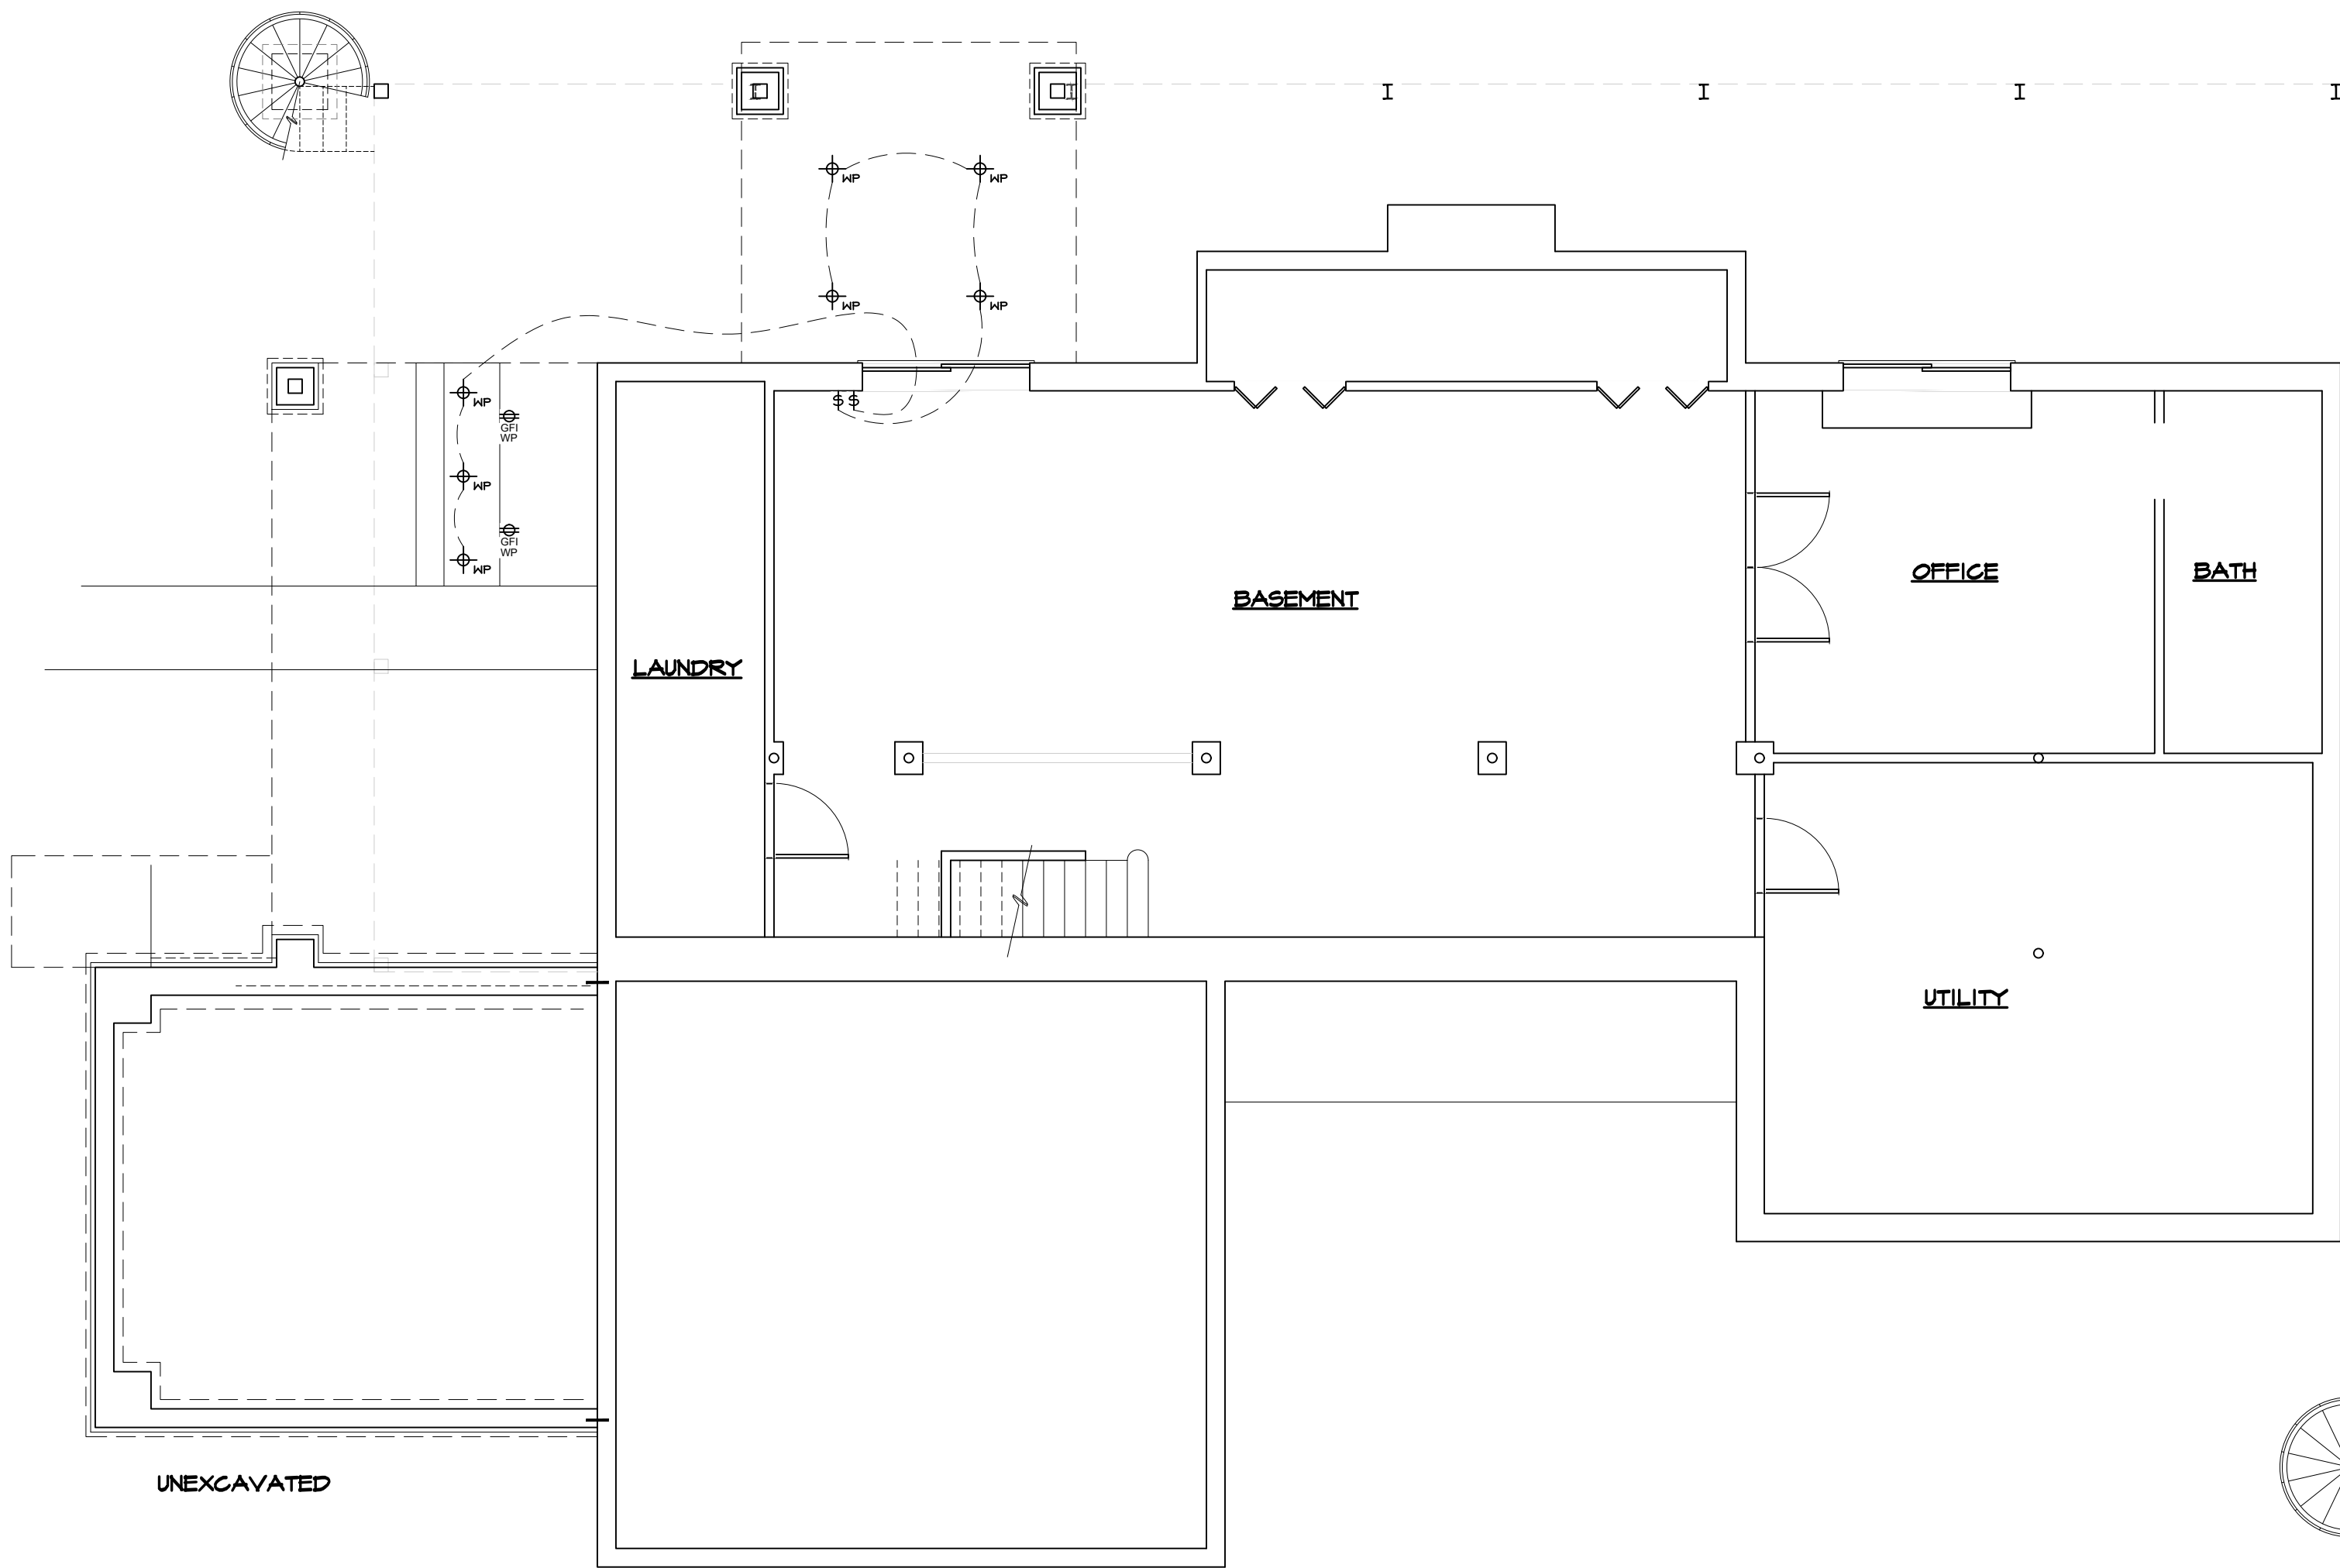

BASEMENT ELECTRICAL PLAN
SCALE: 1/4" = 1'-0"

ELECTRICAL SYMBOL LIST

	DUPLEX OUTLET - 20 AMP (ARC FAULT INTERRUPT + TAMPER PROOF) SUBSCRIPTS: GFI = GROUND FAULT INTERRUPT WP = WATER PROOF R = RECESSED (ALL LOCATIONS WITH T.V. - VERIFY HEIGHT WITH OWNER PRIOR TO INSTALL)
	OPTIONAL: QUAD OUTLETS IN "LIVING" SPACES (AS DIRECTED BY OWNER)
	RECESSED LIGHT, 75 WATT - 1/1" WITH MIN. 3" CLEAR TO COMBUSTIBLE INSULATION
	HANGING FIXTURE AS SELECTED BY OWNER (OR SURFACE MOUNTED)
	WALL SCONCE AS SELECTED BY OWNER
	UNDER COUNTER/ISLAND LIGHTING
	SINGLE POLE SWITCH 125V NOTE: SWITCHES SHALL HAVE DIMMERS
	THREEWAY SWITCH 125V NOTE: SWITCHES SHALL HAVE DIMMERS
	SMOKE DETECTOR - HARDWIRED WITH BATTERY BACK-UP (INTERCONNECTED)
	COMBINATION SMOKE & CARBON MONOXIDE DETECTOR - HARDWIRED WITH BATTERY BACK-UP (INTERCONNECTED)

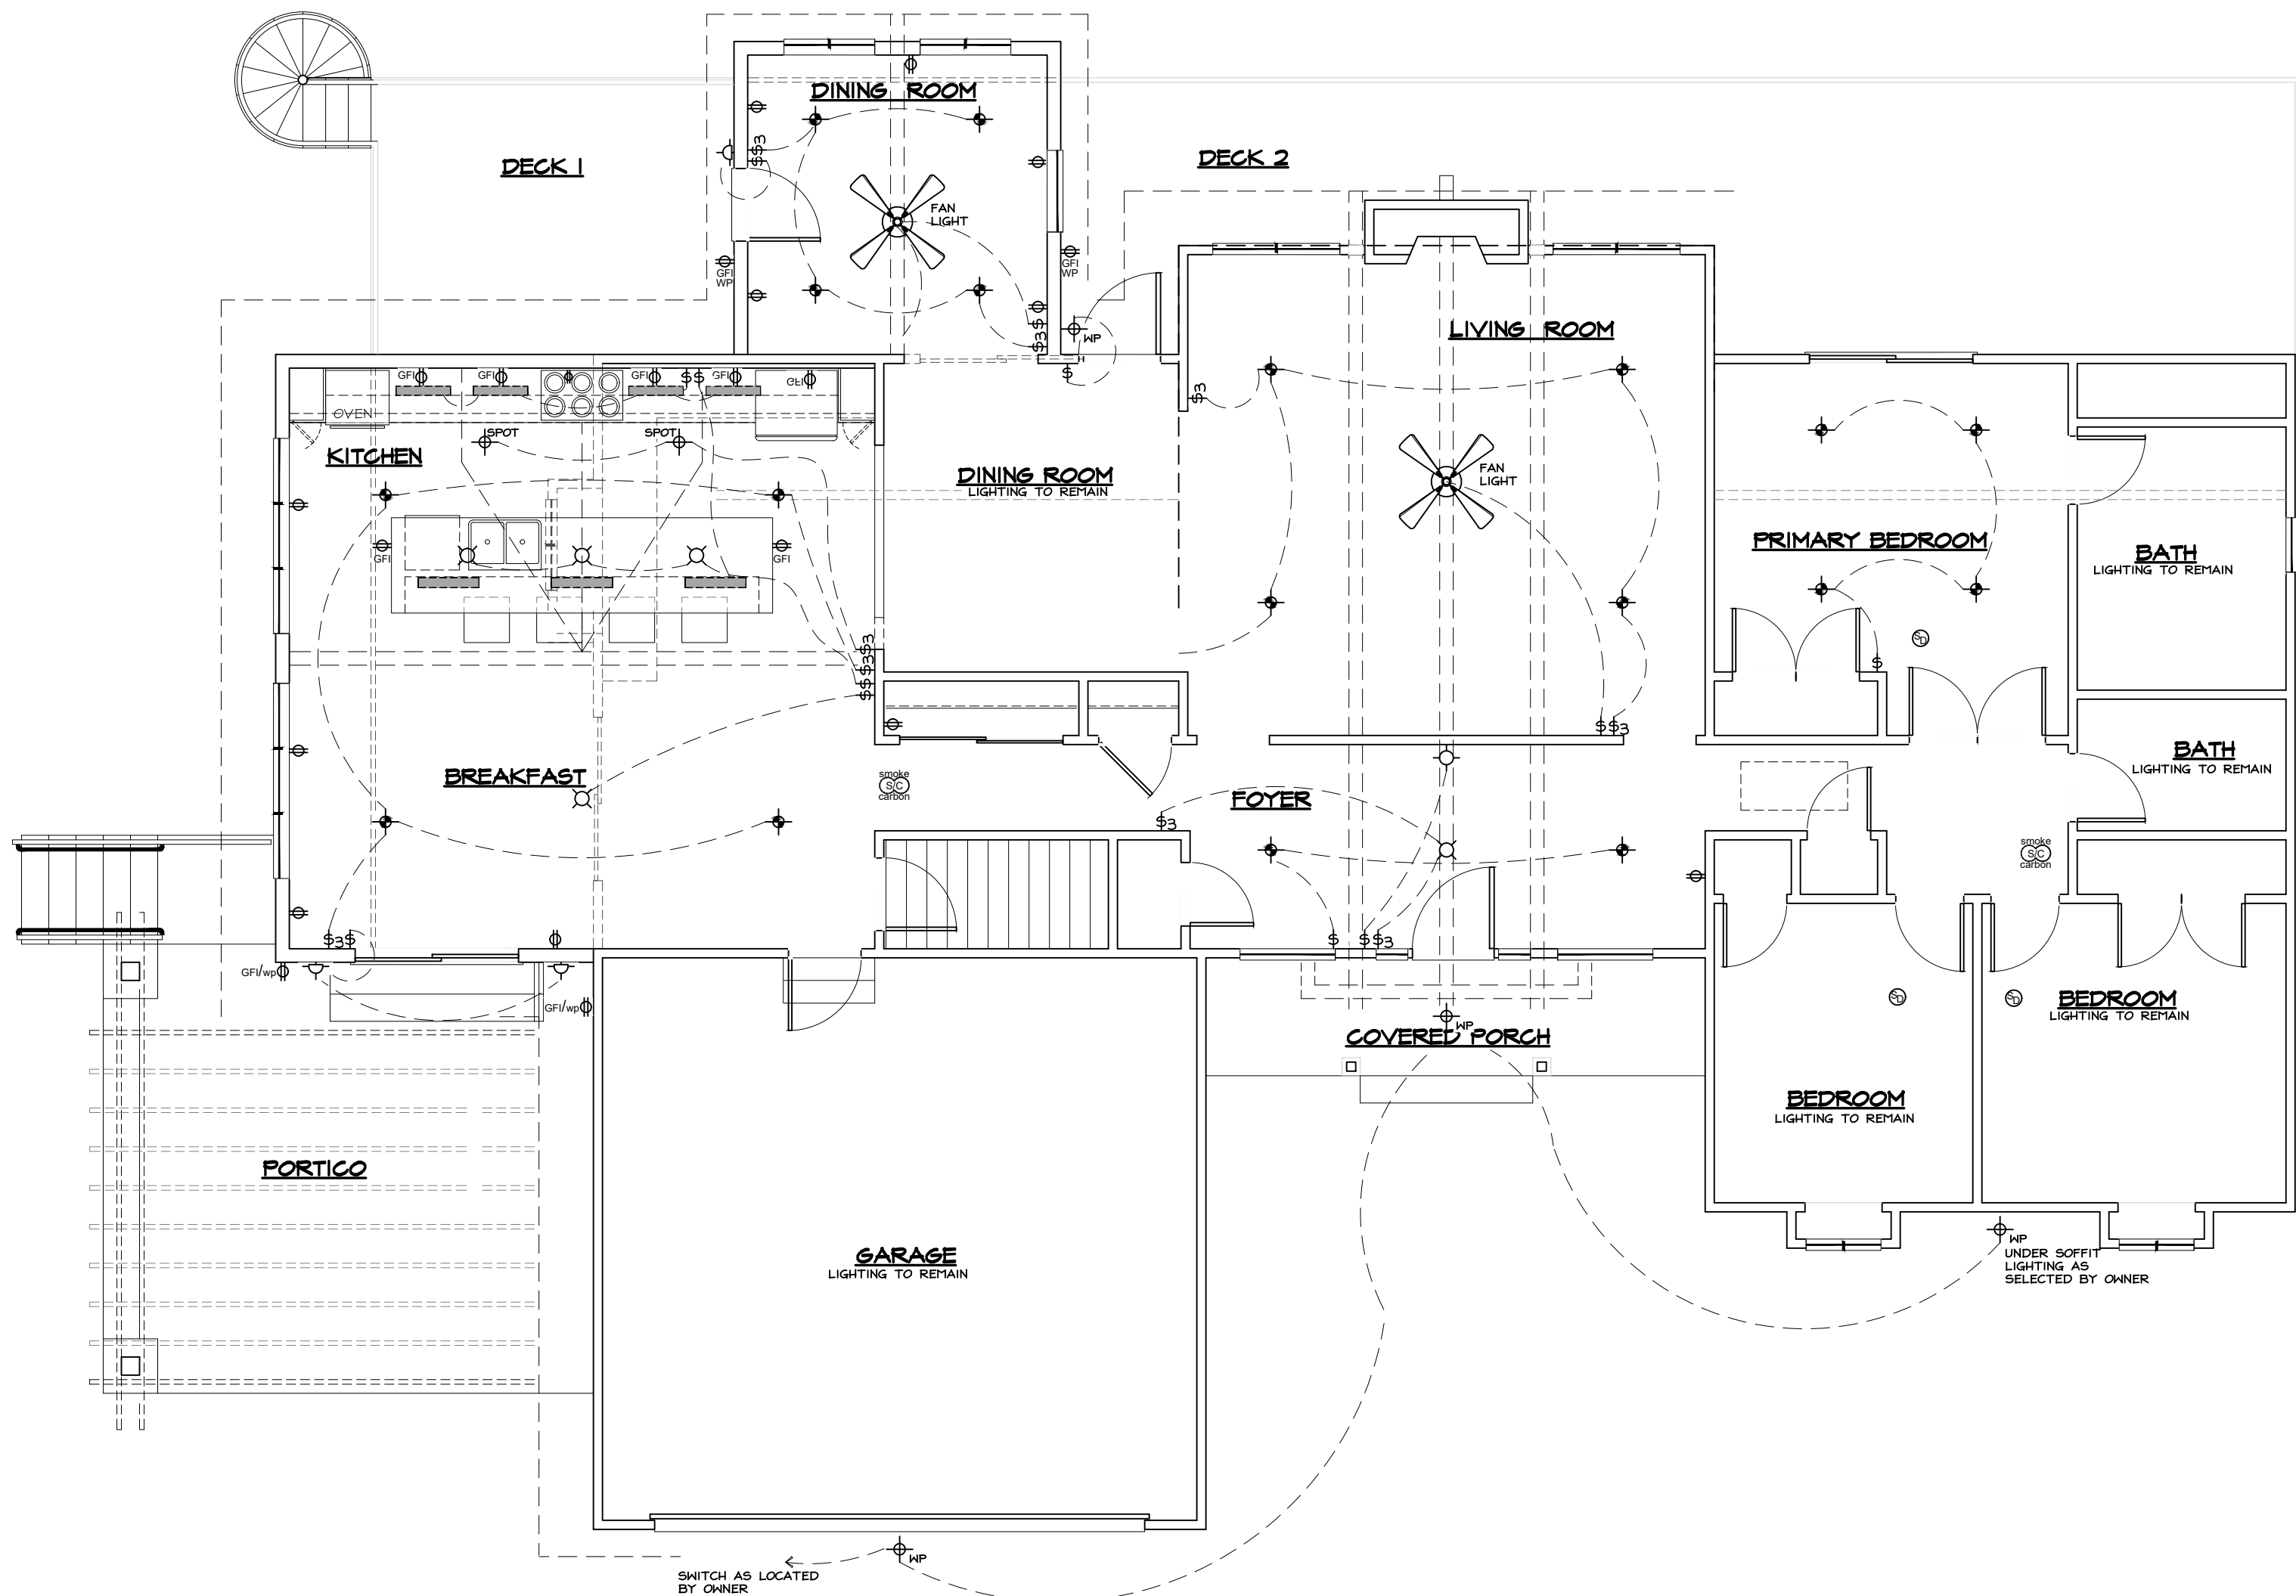

FIRST FLOOR ELECTRICAL PLAN
SCALE: 1/4" = 1'-0"

E-1


drawing

Charles Schaffer
C. 7620
P. 7620
NY 022558-1

CHARLES SCHAFER ASSOCIATES LLC
architect · planner

206 NEWTON - SPARTA ROAD · NEWTON, NEW JERSEY 07860 973-383-7355

ADDITION TO RESIDENCE FOR:
JARED FERREIRA
35 PHILLIPS RD, GREEN TWP, NJ

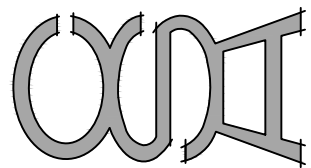

date 5.5.26

drawn by JM

checked by CS